

10-25-00

A

JC948 U.S. PTO
10/24/00

LIMBACH & LIMBACH L.L.P.
2001 Ferry Building, San Francisco, CA 94111
415/433-4150

Address to:
Box Patent Application
Commissioner for Patents
Washington, D.C. 20231

Attorney's Docket No. SONY-U0300

First Named Inventor YUICHIRO DEGUCHI

JC929 U.S. PTO
09/695636
10/24/00


UTILITY PATENT APPLICATION TRANSMITTAL
(under 37 CFR 1.53(b))

SIR:

Transmitted herewith for filing is the patent application entitled:
SEARCHING SYSTEM, SEARCHING UNIT, SEARCHING METHOD, DISPLAYING METHOD FOR
SEARCH RESULTS, TERMINAL UNIT, INPUTTING UNIT, AND RECORD MEDIUM

CERTIFICATION UNDER 37 CFR § 1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date October 24, 2000, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EL387334983US addressed to: Box Patent Application, Commissioner for Patents, Washington, D.C. 20231.

~~Elizabeth Reicker~~ **JOAN MAZZEO** 
(Name of person mailing paper) (Signature)

Enclosed are:

1. ☒ Transmittal Form (two copies required)
2. The papers required for filing date under CFR § 1.53(b):
 - i. 130 Pages of specification (including claims and abstract);
 - ii. 23 Sheets of drawings.
 ___ formal ☒ informal
3. Declaration or oath
 - a. ☒ Unsigned - Combined with Power of Attorney

ACCOMPANYING APPLICATION PARTS

4. ___ An assignment of the invention to Sony Corporation is attached (including Form PTO-1595).
 - i. ___ 37 CFR 3.73(b) Statement (when there is an assignee)
5. ☒ Power of Attorney - Unsigned - Combined with Declaration
6. ___ An Information Disclosure Statement (IDS) is enclosed, including a PTO-1449 and copies of ___ references.
7. ___ Preliminary Amendment.
8. ☒ Return Receipt Postcard (MPEP 503 -- should be specifically itemized)
9. FOREIGN PRIORITY
 - [x] Priority of application nos. P11-304389 and P11-306817 filed on October 26, 1999 and October 28, 1999; respectively in Japan are claimed under 35 USC 119.

The certified copy of the priority application:

- ☒ are filed herewith; or
- ___ has been filed in prior application no. ___ filed on __, or
- ___ will be provided.

___ English Translation Document (if applicable)

10. FEE CALCULATION

- a. ☐ Amendment changing number of claims or deleting multiple dependencies is enclosed.

CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Basic Fee (\$710)
Total Claims	105 - 20	* 85	x \$18.00	1,530.00
Independent Claims	25 - 3	* 22	x \$80.00	1,760.00
<input type="checkbox"/> Multiple dependent claim(s), if any			\$270.00	0

*If less than zero, enter "0".

Filing Fee Calculation \$4,000.00

50% Filing Fee Reduction (if applicable) \$

11. Small Entity Status

- a. ☐ A small entity statement is enclosed.
b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
c. ☐ is no longer claimed.

12. Other Fees

- ☐ Recording Assignment [\$40.00] \$
☐ Other fees
Specify _____ \$

Total Fees Enclosed \$4,000.00

13. Payment of Fees

- ☒ Check(s) in the amount of \$ 4,000.00 enclosed.
☐ Charge Account No. 12-1420 in the amount of \$ ____.
A duplicate of this transmittal is attached.

14. All correspondence regarding this application should be forwarded to the undersigned attorney:

Charles P. Sammut
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111
Telephone: 415/433-4150
Facsimile: 415/433-8716

15. Authorization to Charge Additional Fees


- ☒ The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or § 1.17 to Account No. 12-1420. **A duplicate of this transmittal is attached.**

LIMBACH & LIMBACH L.L.P.

October 24, 2000
(Date)

Attorney Docket No. SONY-U0300
[S00P1300US00]

By:


Charles P. Sammut
Registration No. 28,901
Attorney(s) or Agent(s) for Applicant(s)

BY EXPRESS MAIL NO. EL387334983US
Attorney Docket No. SONY-U0300

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Application for Letters Patent

Title : SEARCHING SYSTEM, SEARCHING UNIT,
SEARCHING METHOD, DISPLAYING METHOD FOR
SEARCH RESULTS, TERMINAL UNIT,
INPUTTING UNIT, AND RECORD MEDIUM

Inventor(s): Yuichiro DEGUCHI
Akiko MATSUOKA

SEARCHING SYSTEM, SEARCHING UNIT, SEARCHING METHOD,
DISPLAYING METHOD FOR SEARCH RESULTS, TERMINAL UNIT,
INPUTTING UNIT, AND RECORD MEDIUM

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a searching system, a searching unit, a searching method, a displaying method for search results, a terminal unit, an inputting unit, and a record medium that allow information that was broadcast to be searched and properly obtained.

Description of the Related Art

A database system that allows data to be searched from a database stored in a computer system is known. The user obtains desired information directly from the database system or using a terminal unit connected thereto through a network. The user inputs a keyword that he thinks it is proper from the terminal unit. The database system searches the database corresponding to the input keyword and provides the user with the search results through the terminal unit. When the database system has provided the user with much information, the user can filter the information using another keyword.

Now, the case that the user searches music data from a database system will be considered. The user can know for example title information of a CD

(Compact Disc) that contains his or her desired musical piece from the search results so as to purchase the CD. In this case, the music data is information about a musical piece as a unit of music. The music data is composed of for example a musical piece name, a performer name, an album name (namely, a music CD title), a released date, and a seller. The music data may contain audio data of a musical piece. In the database system, additional information that is for example a performer name, a title, an album name, and so forth is assigned as keywords of music data to each musical piece.

For example, when the user likes a musical piece that was broadcast from a radio broadcasting station, he or she searches the musical piece from such a music database. In this case, the user searches his or her favorite musical piece using keywords corresponding to additional information that was announced along with the musical piece.

In such a conventional music database system, unless the user inputs a proper keyword to the database system, he or she cannot obtain desired results. Thus, conventionally, when the user forgot additional information that was announced along with the musical piece, he or she cannot obtain desired information.

There is a situation that the user always carries a terminal unit that can search a musical piece

from a music database and he or she searches a desired musical piece that was broadcast from a radio broadcasting station with the terminal unit. In this case, if the user likes a music that he listened to only a last part thereof, he or she cannot obtain the additional information of the musical piece. Thus, even if the user has such a terminal unit, he or she cannot know a keyword that he or she should input.

Thus, even if a contents provider who sells musical pieces and CDs provides listeners with a radio program, it does not directly contribute to sales of the musical pieces and CDs.

In the case of a digital broadcast, additional information may be superimposed to music data that is broadcast. Thus, the user can obtain additional information about a musical piece from digital data. However, in this case, the broadcasting station should create additional data for each musical piece to be broadcast and superimpose the additional data to the musical piece. Thus, the cost on the broadcasting station side increases. In addition, the user side should prepare a receiving unit that can extract additional information from digital data.

OBJECTS AND SUMMARY OF THE INVENTION

Therefore, an object of the present invention is to provide a searching system, a searching unit, a searching method, a displaying method for search

results, a terminal unit, an inputting unit, and a record medium that allow the user to search contents that were broadcast without need to know an accurate keyword.

5 A first aspect of the present invention is a searching system for searching contents that were broadcast, the searching system having an inputting unit, a searching unit, and a terminal unit, wherein the inputting unit comprises a first storing means for storing information representing at least time at which
10 contents were broadcast corresponding to a predetermined operation, and a first communicating means for transmitting the information representing time stored in the storing means to an external unit, wherein the searching unit comprises a second storing
15 means for correlatively storing information representing contents and broadcast time thereof, and a searching means for searching information representing the contents stored in the second storing means
20 corresponding to the information representing time, and wherein the terminal unit comprises a second communicating means for receiving the information representing time transmitted from the inputting unit through the first communicating means, a third
25 communicating means for transmitting the information representing time received by the second communicating means and receiving search results transmitted from the

searching unit, and a first displaying means for displaying the information representing time received by the second communicating means and the search results by the searching unit.

5 A second aspect of the present invention is a terminal unit for causing contents that were broadcast to be searched, comprising a first communicating means for receiving time information representing predetermined time from an inputting unit and transmitting the information representing the
10 predetermined time to an external unit, a second communicating means for transmitting the information representing the predetermined time received from the first communicating means to a searching unit and receiving search results from the searching unit, the
15 searching unit searching information representing contents from a storing means corresponding to the information representing the predetermined time, the storing means correlatively storing the information
20 representing the contents and broadcast time thereof, and a displaying means for displaying the information representing the predetermined time received by the first communicating means and the search results of the
 searching unit.

25 A third aspect of the present invention is a terminal unit for causing contents that were broadcast to be searched, comprising a first storing means for

storing time information representing predetermined time corresponding to a predetermined operation, a communicating means for transmitting the information representing the predetermined time to a searching unit and receiving search results from the searching unit, the searching unit searching information representing contents from a second storing means corresponding to the information representing the predetermined time, the second storing means correlatively storing the information representing the contents and broadcast time thereof, and a displaying means for displaying the information representing the predetermined time stored in the first storing means and the search results of the searching unit.

A fourth aspect of the present invention is a searching unit for searching contents that were broadcast, comprising a database for correlatively storing information representing contents and broadcast time thereof, and a communication interface for receiving time information representing predetermined time and identification information of contents from an external unit, wherein the information representing the contents is searched corresponding to the received time information representing the predetermined time and the received identification information of the contents.

A fifth aspect of the present invention is a searching method for searching contents that were

broadcast, comprising the steps of (a) storing
information representing at least time at which
contents were broadcast corresponding to a
predetermined operation of an inputting unit to a first
5 storing means, (b) transmitting the information
representing time stored in the first storing means to
an external unit, (c) causing a searching unit to
search information representing contents stored in a
second storing means corresponding to the information
10 representing time, (d) receiving the information
representing time transmitted from the inputting unit
at the first communicating step (b), (e) transmitting
the information representing time received at the
second communicating step (d) and receiving search
15 results transmitted from the searching unit, (f)
displaying the information representing time received
at the second communicating step (d), and (g)
displaying the search results of the searching unit.

A sixth aspect of the present invention is a
20 searching method for searching contents that were
broadcast, comprising the steps of (a) receiving timing
information representing predetermined time and
identification information of contents from an external
unit, (b) searching the information representing the
25 contents from a database corresponding to the received
time information representing time and the received
identification information of the contents, the

database correlatively storing the information representing the contents and broadcast time thereof, and (c) transmitting search results searched at the searching step (b) to the external unit.

5 A seventh aspect of the present invention is a displaying method for causing a terminal unit to display search results of contents that were broadcast, comprising the steps of (a) receiving time information representing predetermined time from an inputting unit, 10 (b) transmitting the information representing the predetermined time to an external unit, (c) transmitting the information representing the predetermined time received at the first communicating step (a) to a searching unit, the searching unit 15 searching information representing contents from a database corresponding to the information representing the predetermined time, the database correlatively storing the information representing the contents and broadcast time thereof, (d) receiving search results from the searching unit, and (e) displaying the 20 information representing the predetermined time received at the first communicating step (a) and the search results received at the fourth communicating step (d).

25 An eighth aspect of the present invention is a displaying method for causing a terminal unit to display search results of contents that were broadcast,

comprising the steps of (a) storing time information
representing predetermined time corresponding to a
predetermined operation, (b) transmitting the
information representing the predetermined time stored
5 at the storing step (a) to a searching unit, the
searching unit searching information representing
contents from a database corresponding to the
information representing the predetermined time, the
database correlatively storing the information
10 representing the contents and broadcast time thereof,
(c) receiving search results from the searching unit,
and (d) displaying the information representing the
predetermined time stored at the storing step (a) and
the search results of the contents received at the
15 second communication step (c).

A ninth aspect of the present invention is a
record medium for recording a control program that
causes search results of contents to be displayed on a
terminal unit, the control program causing the terminal
20 unit to perform the steps of (a) receiving time
information representing predetermined time from an
inputting unit, (b) transmitting the information
representing the predetermined time to an external
unit, (c) transmitting the information representing the
25 predetermined time to a searching unit, the searching
unit searching information representing contents from a
database corresponding to the information representing

the predetermined time, the database correlatively storing the information representing the contents and broadcast time thereof, (d) receiving search results from the searching unit, and (e) displaying at least the received search results.

A tenth aspect of the present invention is a record medium for recording a control program that causes search results of contents to be displayed on a terminal unit, the control program causing the terminal unit to perform the steps of (a) storing time information representing predetermined time corresponding to a predetermined operation, (b) transmitting the information representing the predetermined time stored at the storing step (a) to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing the predetermined time, the database correlatively storing the information representing the contents and broadcast time thereof, (c) receiving search results from the searching unit, and (d) displaying at least the search results on the terminal unit.

An eleventh aspect of the present invention is a record medium for recording a control program that causes an inputting unit to input information representing time to a researching unit, the control program causing the inputting unit to perform the steps

of (a) storing time information representing
predetermined time corresponding to user's operation,
(b) transmitting the time information representing the
predetermined time stored at the storing step (a) to an
5 external unit, and (c) inputting the time information
representing the predetermined time to a searching
unit, the searching unit searching information
representing contents from a database corresponding to
the time information representing the predetermined
10 time at which contents were broadcast, the database
correlatively storing the information representing the
contents and broadcast time thereof.

A twelfth aspect of the present invention is
a record medium for recording a control program that
causes an inputting unit having a counter that operates
15 with a predetermined clock signal and that inputs
information representing time to a searching unit, the
control program causing the inputting unit to perform
the steps of (a) storing a count value of the counter
at predetermined time corresponding to user's
20 operation, (b) transmitting the count value stored at
the storing step (a) to an external unit, and (c)
inputting the information representing time to the
searching unit, the searching unit searching
25 information representing contents from a database
corresponding to the information representing time at
which contents were broadcast, the database

correlatively storing the information representing the contents and broadcast time thereof.

5 A thirteenth aspect of the present invention is an inputting unit for inputting information representing time, comprising a counter that operates with a predetermined clock signal, a storing means for storing a count value of the counter at predetermined time corresponding to user's operation, a connecting portion for directly connecting the count value stored in the storing means to an external unit, and a communicating means for transmitting the count value stored in the storing means to the external unit through the connecting portion, wherein the information representing time is input to a searching unit through the external unit, the searching unit searching information representing contents from a database corresponding to the information representing time at which contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

10
15
20
25 A fourteenth aspect of the present invention is an inputting unit for inputting information representing time, comprising a counter that operates with a predetermined clock signal, a storing means for storing a count value of the counter at predetermined time corresponding to user's operation, a displaying means for displaying the count value stored in the

storing means, and a communicating means for transmitting the count value stored in the storing means to an external unit, wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

A fifteenth aspect of the present invention is an inputting unit for inputting information representing time, comprising a counter that operates with a predetermined clock signal, a storing means for storing a count value of the counter at predetermined time corresponding to user's operation, a communicating means for transmitting the count value stored in the storing means to an external unit, and a sound generating means for generating a sound corresponding to the count value stored in the storing means, wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

A sixteenth aspect of the present invention is an inputting unit for inputting information representing time, comprising a counter that operates with a predetermined clock signal, a first storing means for storing a count value of the counter at predetermined time corresponding to user's operation, an identification information generating means for generating predetermined identification information corresponding to the user's operation, a second storing means for storing the identification information generated by the identification information generating means, and a communicating means for transmitting the count value and the identification information stored in the first storing means and the second storing means to an external unit, wherein information representing time and identification information identifying contents are input to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

A seventeenth aspect of the present invention is an inputting unit for inputting information representing time, comprising a counter that operates with a predetermined clock signal, a first storing means for storing a count value of the counter at

predetermined time corresponding to user's operation, a communicating means for communicating with an external unit and transmitting the count value stored in the first storing means to an external unit, and a second storing means for storing data transmitted from an external unit through the communicating means, wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

An eighteenth aspect of the present invention is an inputting unit for inputting information representing time, comprising a storing means for storing time information representing predetermined time corresponding to user's operation, a displaying means for displaying the number of entries of the time information stored in the storing means, and a communicating means for transmitting the time information stored in the storing means to an external unit, wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to the time information representing time at which the contents were broadcast, the database

correlatively storing the information representing the contents and broadcast time thereof.

5 A nineteenth aspect of the present invention is an inputting unit for inputting information representing time, comprising a first storing means for storing time information representing predetermined time corresponding to user's operation, a communicating means for communicating with an external unit and transmitting the time information stored in the first storing means to the external unit, and a second storing means for storing data transmitted from the external unit through the communicating means, wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to the time information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

20 A twentieth aspect of the present invention is an inputting unit for inputting information representing time, comprising a counter that operates with a predetermined clock signal, a storing means for storing a count value of the counter at predetermined time corresponding to user's operation, a sound generating means for generating a predetermined sound when the count value is stored to the storing means

corresponding to the user's operation, and a communicating means for transmitting the count value stored in the storing means to an external unit, wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

A twenty-first aspect of the present invention is an inputting method for an inputting unit having a counter that operates with a predetermined clock signal, the method comprising the steps of (a) storing a count value of the counter at predetermined time corresponding to user's operation, (b) directly connecting the count value stored at the storing step (a) to an external unit, and (c) transmitting the count value stored at the storing step (a) to the external unit connected at the connecting step (b), wherein information representing time is input to a searching unit through the external unit, the searching unit searching information representing contents from a database corresponding to time information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

A twenty-second aspect of the present invention is an inputting method for an inputting unit having a counter that operates with a predetermined clock signal, the method comprising the steps of (a) storing a count value of the counter at predetermined time corresponding to user's operation, (b) displaying the count value stored at the storing step (a), and (c) communicating the count value stored at the storing step (a) to an external unit, wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to time information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

A twenty-third aspect of the present invention is an inputting method for an inputting unit having a counter that operates with a predetermined clock signal, the method comprising the steps of (a) storing a count value of the counter at predetermined time corresponding to user's operation, (b) transmitting the count value stored at the storing step (a) to an external unit, and (c) generating a sound corresponding to the count value stored at the storing step (a), wherein information representing time is input to a searching unit, the searching unit searching

information representing contents from a database
corresponding to time information representing time at
which the contents were broadcast, the database
correlatively storing the information representing the
contents and broadcast time thereof.

5 A twenty-fourth aspect of the present
invention is an inputting method for an inputting unit
having a counter that operates with a predetermined
clock signal, the method comprising the steps of (a)
10 storing a count value of the counter at predetermined
time corresponding to user's operation, (b) generating
predetermined identification information corresponding
to the user's operation, (c) storing the identification
information generated at the identification information
generating step (b), (d) transmitting the count value
15 and the identification information stored at the first
storing step (a) and the second storing step (c) to an
external unit, wherein information representing time is
input to a searching unit, the searching unit searching
20 information representing contents from a database
corresponding to time information representing time at
which the contents were broadcast, the database
correlatively storing the information representing the
contents and broadcast time thereof.

25 A twenty-fifth aspect of the present
invention is an inputting method for an inputting unit
having a counter that operates with a predetermined

clock signal, the method comprising the steps of (a)
storing a count value of the counter at predetermined
time corresponding to user's operation, (b)
communicating with an external unit and transmitting
the count value stored at the first storing step (a) to
the external unit, and (c) storing the data transmitted
from the external unit at the communicating step (b),
wherein information representing time is input to a
searching unit, the searching unit searching
information representing contents from a database
corresponding to time information representing time at
which the contents were broadcast, the database
correlatively storing the information representing the
contents and broadcast time thereof.

According to searching system and searching
method of the present invention, in an inputting unit,
information representing at least time at which
contents were broadcast is stored in a storing means by
a predetermined operation. The information is
transmitted to the outside. A searching unit searches
information representing contents from the storing
means corresponding to information representing time.
The storing means correlatively stores information
representing contents and broadcast time thereof. A
terminal unit receives information representing time
from the inputting unit and transmits the information
to the searching unit. Search results are supplied

from the searching unit to the terminal unit. The terminal unit displays the information representing time received from the inputting unit and the search results received from the searching unit. Thus, information representing time at which contents were broadcast is input from the inputting unit. The information representing time is transmitted to the searching unit. The searching unit searches information representing the contents corresponding to the information representing time. The terminal unit displays the information representing the contents.

These and other objects, features and advantages of the present invention will become more apparent in light of the following detailed description of a best mode embodiment thereof, as illustrated in the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram showing the structure of an information searching system according to the present invention;

Fig. 2 is a schematic diagram showing an example of the structure of a musical piece data searching system according to a first embodiment of the present invention;

Fig. 3 is a schematic diagram showing an example of a play list;

Fig. 4 is a schematic diagram showing an

example of the appearance of an auxiliary terminal unit
(for example, a book marker) according to the first
embodiment of the present invention;

Fig. 5 is a block diagram showing an example
of the structure of the book marker according to the
first embodiment of the present invention;

Fig. 6 is a schematic diagram showing an
example of time information stored in a memory of the
book marker;

Fig. 7 is a block diagram showing an example
of the structure of a gateway device;

Fig. 8 is a schematic diagram showing a
registration screen of the gateway device, the
registration screen being used to register a user and a
book marker that the user has;

Fig. 9 is a flow chart showing an example of
a contents searching process according to the present
invention;

Fig. 10 is a schematic diagram showing an
example of a display screen of the gateway device
according to the first embodiment of the present
invention;

Figs. 11A and 11B are schematic diagrams
showing an example of the structure of the book marker;

Fig. 12 is a schematic diagram showing an
example of the appearance of a cradle to which the book
mark was mounted;

Figs. 13A, 13B, and 13C are schematic diagrams showing an example of members that appears on the displaying portion in the case that entries of time information are being transmitted;

5 Figs. 14A and 14B are schematic diagrams showing a modification of the book marker;

Figs. 15A and 15B are schematic diagrams showing another modification of the book marker;

10 Figs. 16A and 16B are schematic diagrams showing another modification of the book marker;

Fig. 17 is a schematic diagram showing another modification of the book marker;

Fig. 18 is a schematic diagram showing another modification of the book marker;

15 Fig. 19 is a schematic diagram showing another modification of the book marker;

Fig. 20 is a first part of a flow chart showing a process after the user obtains a book marker until he or she purchases a music CD;

20 Fig. 21 is a second part of the flow chart shown in Fig. 20;

Fig. 22 is a schematic diagram showing an example of a time information selection screen displayed on a personal computer in the case that time information was transmitted to the personal computer;

25 Fig. 23 is a schematic diagram showing an example of a search result display screen displayed on

the personal computer corresponding to transmitted search results;

Fig. 24 is a schematic diagram showing an example of a musical piece demonstration screen displayed on the personal computer;

Fig. 25 is a schematic diagram showing an example of a musical piece information saving screen displayed on the personal computer;

Fig. 26 is a schematic diagram showing an example of a shopping cart screen for displaying the contents of a shopping cart;

Fig. 27 is a schematic diagram showing an example of a purchasing screen displayed in the case that the personal computer is accessed to a web site on which the user can purchase a music CD;

Fig. 28 is a block diagram showing an example of the structure of a searching system according to a second embodiment of the present invention; and

Fig. 29 is a schematic diagram showing a money flow that takes place according to the second embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Next, the present invention will be described in detail. First of all, an outline of the present invention will be described. Fig. 1 shows an outlined structure of an information searching system according to the present invention. Referring to Fig. 1, the

information searching system comprises two databases 1 and 2, a search engine 3, and an auxiliary terminal unit 4. The search engine 3 searches the databases 1 and 2. The auxiliary terminal unit 4 assists the user for search conditions.

The database 1 stores information about contents that were broadcast from broadcasting mediums such as radio broadcasting stations. The database 1 correlatively stores musical piece names that were broadcast from radio broadcasting stations, time information representing time at which these musical pieces were broadcast, and broadcasting station information representing the broadcasting stations that broadcast these musical pieces. The database 1 may store information about contents of other broadcasting mediums. The contents may be commodity information as well as musical pieces.

The database 1 correlatively stores musical piece names and additional information thereabout. The additional information about each musical piece is composed of for example a music CD number, CD title information, information of a performer and a composer, the words, a guidance, and so forth. The additional information of each musical piece may be stored to another database that can be searched from the search engine 3.

In this example, it is assumed that the broadcasting medium is a radio broadcasting station and that contents provided by the broadcasting medium are musical pieces.

5 The database 2 stores information about contents stored in the database 1. When contents are musical pieces that were broadcast from a broadcasting medium, information about contents (for example, an album (CD) name, performer information, a seller, and a released date) is correlated with musical piece names and stored. The database 2 can also store customer information of the system. The database 2 stores customer ID information unique to each auxiliary terminal unit 4 (that will be described later) and other information about each customer.

10 The search engine 3 searches information from the database 1 corresponding to a search condition designated by the user. In this example, the engine represents a structure of a block that provides the user with a particular function. The search engine 3 provides the user with a particular searching function.

15 When the user likes a musical piece that was broadcasted from a radio broadcasting station, if he or she knows the radio broadcasting station, the location, and the broadcast time, he or she designate location information 5, broadcasting station information 6, and time information 7 as search conditions to the search

engine 3. The search engine 3 searches the database 1 corresponding to the designated search conditions and outputs for example a musical piece name as the search results. In addition, the search engine 3 searches the database 2 using the musical piece name as a search condition and outputs an album name, a seller name, , performer name information, and so forth of the musical piece. The search results of the database 2 are supplied to the user.

On the other hand, when the user wants to search a desired musical piece that was broadcast from a radio broadcasting station, he or she may not know the information 5, 6, and 7 or ambiguously knows them. However, according to the present invention, the user has the auxiliary terminal unit 4 that can obtain time information 7. In addition, the location information 5 and the broadcasting station information 6 of the user are pre-stored as customer information to the database 2.

In other words, when the user likes a musical piece that was broadcast, he or she operates the auxiliary terminal unit 4 so as to store time information 7' at which the musical piece was broadcast. Thereafter, the user causes the search engine 3 to search a musical piece corresponding to the time information 7'. The search engine 3 searches the database 1 corresponding to the time information 7',

the location information 5, and the broadcasting station information 6 (the information 5 and 6 have been stored in the database 2). The search engine 3 searches the database 2 corresponding to a musical piece name obtained as the search results. The search results are supplied as alternatives of user's desired information to the user.

According to the system of the present invention, when the user likes a musical piece that was broadcast, he or she can obtain desired information by causing the auxiliary terminal unit 4 to store the time information 7'.

Next, a first embodiment of the present invention will be described. Fig. 2 shows an example of the structure of a musical piece data searching system. In Fig. 2, similar portions to those in Fig. 1 are denoted by similar reference numerals and their description is omitted. The database 1, the database 2, and the search engine 3 compose a book mark search engine 10. The book mark search engine 10 is connected to another web site (not shown) through a communication line such as Internet.

A web site is a place from which information is published to the network. The book mark search engine 10 is one web site. For example, the book mark search engine 10 is connected to a database (not shown) as another web site. The location of a web site is

represented with address information referred to as URL
(Uniform Resource Locator).

A broadcasting station 12 is for example a
radio broadcasting station. The broadcasting station
12 broadcasts for example musical pieces as contents
corresponding to a pre-created play list. The play
list may be created after the contents were broadcast.
Information such as commodity information other than
musical pieces may be broadcast as contents. The
broadcasting station 12 may be a television
broadcasting station that wirelessly or non-wirelessly
broadcasts TV program, a CATV (Cable Television), or a
non-wireless broadcasting station that mainly
broadcasts musical pieces.

The book mark search engine 10 and the
broadcasting station 12 are connected through a
communication line such as Internet. The above-
described play list is transmitted from the
broadcasting station 12 to the book mark search engine
10. The book mark search engine 10 stores the received
play list to the database 1. Fig. 3 shows an example
of a play list. In the example shown in Fig. 3, for
example one musical piece as contents that was
broadcast is correlated with the name of the
broadcasting station 12 that broadcast the contents
(Station Name), the broadcasting area of the
broadcasting station 12 (Area), the broadcast start

time of the contents (musical pieces) (Start Time), the broadcast end time of the contents (End Time), and the contents name (Content).

5 A play list stored in the database 1 is not always transmitted from the broadcasting station 12. In other words, a play list may be manually created using information of broadcast programs. The created play list may be stored to the database 1 through a predetermined storage medium. Alternatively, a play
10 list may be created by another system other than a broadcasting station and transmitted to the book mark search engine 10. The database 1 can store a plurality of play lists of different broadcasting stations in such a manner that they are identified.

15 The book mark search engine 10 and a gateway device 11 are bidirectionally connected through a communication line 8 such as Internet. As will be described later, the gateway device 11 is for example a personal computer. The gateway device 11 can
20 bidirectionally communicate with the book mark search engine 10. In addition, the gateway device 11 can communicate with the auxiliary terminal unit 4 that the user has.

25 The gateway device 11 is not limited to a personal computer. For example, the gateway device 11 may be a set top box used to connect a television receiver and a digital network. As another example,

the gateway device 11 may be an IRD (Integrated Receiver Decoder) that is a digital broadcasting receiver. In addition, the gateway device 11 is not limited to a device that can be used by individuals. For example, an information terminal unit that is installed as a public terminal unit in a retail store may be used as the gateway device 11.

Fig. 4 shows an example of the appearance of the auxiliary terminal unit 4 according to the first embodiment of the present invention. Hereinafter, the auxiliary terminal unit 4 is referred to as book marker 4. The book marker 4 has an inputting portion 20 and a displaying portion 21. The inputting portion 20 is composed of for example buttons. The displaying portion 21 displays the current time. In addition, the book marker 4 has a connector 22 that is an electric connecting point used to communicate with the gateway device 11.

The book marker 4 is simply structured as will be described later. For example, the book marker 4 may be contained in a small case that can be used as a key holder. As another example, the book marker 4 may be built in various types of electronic devices. As will be described later, the book marker 4 may be built in a radio receiver. In addition, the book marker 4 may be built in a car stereo system of an automobile. Of course, the book marker 4 may be built

in other than electronic devices. The book marker 4 may be preferably built in a portable device or a device that can be portably used.

Fig. 5 shows an example of the structure of the book marker 4 according to the first embodiment of the present invention. In Fig. 5, a CPU (Central Processing Unit) 25 has a memory, a bus, a particular interface, and so forth (that are not shown). A button 20, a displaying portion 21, a memory 26, a timer 28, an interface 29, and a ROM (Read Only Memory) 91 are connected to the CPU 25. The timer 28 outputs the current time. Under the control of the CPU 25, the current time can be adjusted. The displaying portion 21 is composed of for example an LCD (Liquid Crystal Display). The displaying portion 21 is controlled by the CPU 25. Time information is supplied from the timer 28 to the displaying portion 21 under the control of the CPU 25. The displaying portion 21 may be omitted.

The ROM 91 pre-stores a program that causes the book marker 4 to be controlled. The CPU 25 controls the operation of the book marker 4 corresponding to the program stored in the ROM 91. The CPU 25 controls the operations of the displaying portion 21, the button 20, the communication through the interface 29, the access control of the memory 26, and so forth.

The CPU 25 detects the operation of the button 20 performed by the user. Time information at which the button 20 is operated is stored to the memory 26 corresponding to the output of the timer 28. As shown in Fig. 6, a plurality of entries of time information can be stored to the memory 26. Each entry of time information is assigned to a unique sequence number. A terminal ID 27 is stored at a particular area of the memory 26. The terminal ID 27 is a unique ID that identifies the book marker 4.

In the above-described example, information stored in the memory 26 corresponding to the operation of the button 20 is time information and identification information that identifies each entry of the time information. However, the present invention is not limited to such an example. In other words, time information and category information thereof can be stored to the memory 26. When the user operates the button 20, the CPU 25 determines whether the user momentarily presses the button 20 once, presses the button 20 twice in a predetermined time period, or continuously presses the button 20 for a predetermined time period or longer. Corresponding to the detected results, the CPU 25 generates category information and stores the category information, the identification information, and the time information to the memory 26.

For example, when the user momentarily

presses the button 20 once, the CPU 25 determines that he or she has operated the book marker 4 for a radio broadcast. When the user presses the button 20 twice in a predetermined time period, the CPU 25 determines that he or she has operated the book marker 4 for a television broadcast. When the user continuously presses the button 20 for a predetermined time period or longer, the CPU 25 determines that he or she has operated the book marker 4 for an out-of-area. The CPU 25 generates a flag corresponding to the category information. The flag, the time information, and the identification information are correlatively stored in the memory 26.

The interface 29 controls a communication with the outside of the connector 22 (namely, with the gateway device 11). The interface standard of the interface 29 that communicates with the gateway device 11 is not limited. For example, USB (Universal Serial Bus) can be used as an interface standard for a communication between the book marker 4 and the gateway device 11. Alternatively, an interface standard defined as IEEE-1394 may be used. In addition, RS-232C may be used as an interface standard for a communication between the book marker 4 and the gateway device 11.

In addition, as was described above, the communication interface is not limited to a non-

wireless interface. For example, using an infrared ray signal corresponding to IrDA (Infrared Data Association) interface standard, a communication can be made between the book marker 4 and the gateway device 11. In this case, each of the connector 22 and the interface 29 should have transmitting/receiving functions for an infrared ray signal.

In addition, the book marker 4 may be structured as an IC card having an IC (Integrated Circuit) and a communicating means or a PC card corresponding to PCMCIA (Personal Computer Memory Card International Association) standard or JEIDA (Japan Electronic Industry Development Association) standard. When the book marker 4 is structured as an IC card, an interface standard corresponding to the IC card is used as the interface 29. When the book marker 4 is structured as a PC card, a connector corresponding to the PC card is used for the gateway device 11. When the book marker 4 as a PC card is directly attached to the connector corresponding to the PC card, a communication can be made between the book marker 4 and the gateway device 11.

The terminal ID 27 stored in the memory 26 and the time information can be read from the memory 26 and output to the outside through the interface 29 under the control of the CPU 25.

Fig. 7 shows an example of the structure of

the gateway device 11. As was described above, the gateway device 11 may be a conventional personal computer. In Fig. 7, a conventional personal computer is used as the gateway device 11. Referring to Fig. 7, a CPU 31, a ROM (Read Only Memory) 32, a RAM (Random Access Memory) 33, a display controlling circuit 34, and a storage medium (for example, a hard disk 36) are connected to a bus 30. In addition, an inputting means 91 that outputs a control signal corresponding to user's operation is connected to the bus 30. The inputting means 91 is composed of for example a keyboard and a predetermined pointing device (such as a mouse). The CPU 31 operates corresponding to a program stored in the ROM 32 and the hard disk 36. Corresponding to user's operation against the inputting means 91, the CPU 31 performs a predetermined operation. The RAM 33 is used as a work memory of for example the CPU 31. A display control signal that is output from the CPU 31 is supplied to the display controlling circuit 34. The display controlling circuit 34 causes a display 35 to display data corresponding to a display control signal.

In addition, an interface 37 that communicates with the book marker 4 is connected to the bus 30. The interface 37 complies with an interface standard corresponding to the interface 29 of the book marker 4 (for example, USB, IEEE-1394, RS-232C, IrDA,

or the like).

In addition, a communicating means 38 is connected to the bus 30. The communicating means 38 communicates with the book mark search engine 10 through the communication line 8. The communicating means 38 is for example a modem. The communicating means 38 is connected to a public telephone line as the communication line 8. The gateway device 11 is connected to Internet with for example a modem through the public telephone network. In addition, the gateway device 11 can bidirectionally communicate with the book mark search engine 10 through Internet.

An audio processing means 39 is connected to the bus 30. The audio processing means 39 converts digital audio data supplied through the bus 30 into an analog audio signal. The analog audio signal that is output from the audio processing means 39 is reproduced by for example a speaker 90.

As was described above, the user should pre-register his or her information to the database 2 of the book mark search engine 10. The user information can be registered using the gateway device 11. First of all, the user connects the book marker 4 to the gateway device 11 through a predetermined interface. The user operates the gateway device 11 so as to register himself or herself and the book marker 4 to the customer database 2.

Fig. 8 shows an example of fields on a registration screen 40 of the display 35 in the case that the user registers himself or herself and his/her book marker 4 to the customer database 2. A "name" field 41 is used to input the name of the user. A "book mark ID" field 42 is used to input the terminal ID 27 of the user's book marker 4.

The above-described terminal ID 27 is input by a communication between the gateway device 11 and the book marker 4. In other words, a request for the terminal ID 27 is transmitted from the gateway device 11 to the book marker 4. The book marker 4 reads the terminal ID 27 from the memory 26 under the control of the CPU 25 corresponding to the request. The terminal ID 27 is transmitted to the gateway device 11. The gateway device 11 causes the display 35 to display the received terminal ID 27 at the "book mark ID" field 42. In addition, the gateway device 11 causes the RAM 33 to store the received terminal ID 27.

A "zip code" field 43 and a "area code" field 44 are used to input the zip code and the area code of the public telephone line of the user. Corresponding to the contents that was input to the fields 43 and 44, the user's area is represented. With respect to the user's area, information that represents a geographical area can be input instead of the zip code and the area code. Alternatively, an area name that was designated

may be input. A "radio station" field 45 is used to input information that identifies user's favorite radio station. In this example, although a broadcasting station name was input, a frequency band of a radio broadcasting station may be input.

A "card number" field 46 is used to input user's credit card number, user's bank card number, or the like. An "address" field 47 is used to accurately input the user's address. These fields are used when a service using the book marker 4 requires a charging process.

Each piece of information that is input to the fields 41 to 47 is stored to the RAM 33. The information is read from the RAM 33 corresponding to a predetermined operation. The information that is read from the RAM 33 is transmitted to the book mark search engine 10 by the communicating means 38. At this point, each information to be transmitted is preferably encrypted corresponding to a predetermined encrypting method.

On the other hand, the timer 28 is adjusted by the book marker 4. For example, when the terminal ID 27 is registered, the book marker 4 and the gateway device 11 are connected. At this point, the book marker 4 and the gateway device 11 are bidirectionally communicated. Using time information that is output from a timer (not shown) of the gateway device 11, the

timer 28 of the book marker 4 can be adjusted.

Such a process can be performed by a uni-directional communication from the book marker 4 to the gateway device 11. In this case, the book marker 4 and the gateway device 11 are connected. The terminal ID 27 is transmitted from the book marker 4 to the gateway device 11. In addition, time information of the timer 28 is transmitted from the book marker 4 to the gateway device 11. The gateway device 11 compares the transmitted time information with time information represented by the timer (not shown) of the gateway device 11. Corresponding to the difference, the correct time may be calculated.

In these cases, the time information of the timer (not shown) of the gateway device 11 should be adjusted to correct time by a proper manner.

In the above-described example, the book marker 4 has a timer. However, it should be noted that the present invention is not limited to such an example. In other words, a counter that operates with a clock signal having a predetermined period may be disposed in the book marker 4. Corresponding to the count value of the counter, time information that represents the time at which the button 20 was pressed can be obtained. For example, the count value at which the user pressed the button 20 is stored to the memory

26. When the book marker 4 is connected to the gateway device 11 and the count value stored in the memory 26 is transmitted to the gateway device 11, the count value at which the count value was transmitted is also transmitted to the gateway device 11 in addition to the count value that was read from the memory 26.

On the other hand, the gateway device 11 adjusts the timer (not shown) in a predetermined manner and obtains a master clock. For example, the communicating means 38 communicates with the book mark search engine 10 through the communication line 8, obtains time information, and adjusts the timer of the gateway device 11 corresponding to the time information. In addition, a predetermined receiving means may be disposed in the gateway device 11. The receiving means may receive time information contained in a television broadcast or a radio broadcast. Corresponding to the received time information, the timer of the gateway device 11 may be adjusted.

The gateway device 11 obtains the difference between the count value at which the user pressed the button 20 and the count value at which time information was transmitted from the book marker 4. When the count up period of the counter of the book marker 4 is known, the time is traced back from the time at which time information was transmitted from the book marker 4 by the count value of the difference corresponding to the

timer of the gateway device 11. Thus, the time at which the user pressed the button 20 of the book marker 4 and the count value was stored to the memory 26 can be accurately obtained.

5 According to this method, it is not necessary to dispose a clock (timer 28) and the displaying portion 21 that displays time in the book marker 4. This method is preferable because it is not necessary to adjust the timer 28 of the book marker 4.

10 When the book marker 4 is provided with a counter instead of a timer, the count value of the counter corresponds to time information.

15 In the case that the book marker 4 is connected to the gateway device 11, when the gateway device 11 measures the count value of the counter of the book marker 4 at an interval of a predetermined time period, the period of the counter of the book marker 4 can be obtained.

20 In the above-described example, the counter counts with a clock signal having a predetermined period. However, it should be noted that the present invention is not limited to such an example. When the counter value is correlated with the counter start time, the counter can be operated with a clock signal
25 that is generated at any timing. For example, the counter may be operated with an M sequence clock signal generated by a shift register and an exclusive-OR

circuit. Alternatively, by periodically varying the period of a clock signal, the counter can be accomplished. Of course, the gateway device 11 should know the type of the counter used in the book marker 4.

5 When such a clock signal is used for the counter, the book marker 4 can be prevented from illegally being fabricated or used.

10 In the above-described example, the time at which the button 20 was pressed on the book marker 4 is obtained with the gateway device 11. However, it should be noted that the present invention is not limited to such an example. In other words, the gateway device 11 obtains first time information that represents the time at which the button 20 was pressed on the book marker 4 and second time information that represents the time at which the first time information was transmitted from the book marker 4 to the gateway device 11, transmits the first time information and the second time information to the book mark search engine 10, and obtains the accurate time at which the button 20 was pressed corresponding to the master clock of the book mark search engine 10.

The timer 28 of the book marker 4 or the above-described counter may operate as a stop watch.

25 In other words, when the button 20 is operated, the timer 28 or the counter starts counting. Thus, when time information (or count value) is transmitted from

the book marker 4 to the gateway device 11, the timer 28 or the counter is reset and stopped. When the button 20 is operated next time, the timer 28 or the counter starts operating. In such a manner, the power consumption of the book marker 4 can be reduced.

Next, with reference to a flow chart shown in Fig. 9, the contents searching process of the system shown in Fig. 2 will be described. First of all, at step S10, in the above-described manner, the terminal ID 27 of user's book marker 4 is registered to the book mark search engine 10.

The user can store time information to the book marker 4 with the terminal ID 27 at any place (for example, on the street or in the car). When the user likes a musical piece that he or she is listening on the radio, he or she presses the button 20 of the book marker 4. Time information at which the button 20 was pressed is stored to the memory 26 of the book marker 4 (at step S11). A plurality of entries of time information can be stored to the memory 26 of the book marker 4 as long as it has a free space (at step S12).

At step S13, the book marker 4 and the gateway device 11 (abbreviated as G · D in Fig. 9) are connected. At step S14, time information stored to the memory 26 of the book marker 4 is read along with the terminal ID 27. The time information is transmitted to the gateway device 11 through a predetermined

interface. At step S14, the transmitting process is automatically performed after the book marker 4 and the gateway device 11 are connected. At step S15, the time information and the terminal ID 27 that were
5 transmitted from the book marker 4 to the gateway device 11 are transmitted to the book mark search engine 10 through the communication line 8.

At step S16, the book mark search engine 10 searches information corresponding to the time
10 information and the terminal ID 27 transmitted from the gateway device 11. As a search condition, time information is used. When the user wants to know musical piece information, it is searched from the database 1 corresponding to the time information.
15 Corresponding to play lists of broadcasting stations stored in the database 1, musical piece names of musical pieces that were broadcasted from the radio broadcasting stations at the time represented by the time information are output.

20 When the searching process is performed at step S16, the search condition is narrowed corresponding to the user's information registered at step S10. Corresponding to the terminal ID 27 transmitted from the gateway device 11, the database 2
25 is searched. As a result, the user's registration information as the terminal ID 27 is output. The registration information is used as another search

condition.

At this point, only a play list of a particular broadcasting station is searched from the database 1 corresponding to broadcasting station information that was input in the "radio station" field 45 when the terminal ID 27 was registered to the book mark search engine 10 at step S10.

After the play list was searched (at step S17), the search results are supplied to the user. In other words, the search results of the book mark search engine 10 are transmitted to the gateway device 11. The gateway device 11 displays the transmitted search results on a display screen (that will be described later). Thus, the user can know whether or not user's desired information was obtained (at step S18).

When the search results do not contain user's desired information, a relevant message is transmitted from the gateway device 11 to the book mark search engine 10. At step S19, with a changed search condition, the database 1 is searched. For example, as a search condition, broadcasting stations are searched corresponding to information that was input in the "zip code" field 43 and the "area code" field 44. Alternatively, broadcasting stations may be searched corresponding to adjacent areas of the area represented by the fields 43 and 44.

When the database 1 is searched again at step

S19, a search condition may be automatically designated by the book mark search engine 10. For example, at step S10, the bookmark search engine 10 may designate information registered by the user as a search condition one after the other. When the database 1 is searched again, the user may designate a search condition. In this case, the user inputs a new search condition to the gateway device 11. The input search condition is transmitted from the gateway device 11 to the book mark search engine 10.

When user's desired information was searched, the flow advances to step S20. At step S20, the searched information is transmitted from the book mark search engine 10 to the gateway device 11. When information about a musical piece is searched, audio data of the searched musical piece is transmitted from the book mark search engine 10 to the gateway device 11. Audio data of musical pieces can be stored to the database 2. Alternatively, the user can request another web site connected to for example Internet to transmit audio data of a musical piece.

The user can cause the hard disk 36 of the gateway device 11 to store received audio data and the audio processing means 39 and the speaker 90 to reproduce the audio data. When the user likes the reproduced musical piece, he or she can cause the gateway device 11 to communicate with the book mark

search engine 10 and request to purchase an album (CD) that contains the musical piece.

Fig. 10 shows an example of a screen of the gateway device 11 (this screen is displayed at and after step S18). At upper positions of the screen, a user name 51, a terminal ID 27, and an area 52 appear as user's registered information. The area 52 is omitted as an input field on the registration screen shown in Fig. 8. In the example shown in Fig. 10, three radio broadcasting stations "AAAA", "BBBB", and "CCCC" and one CATV (Cable Television) broadcasting station "DDD" have been registered.

Search results of four broadcasting stations by the book mark search engine 10 corresponding to one entry of time information 53 registered to the book marker 4 appear as search results 54, 55, 56, and 57. In this example, musical pieces were broadcast from the broadcasting stations "AAAA", "BBBB", and "DDD" at the time represented by the time information 53. On the other hand, an advertisement was broadcast from the broadcasting station "CCCC" at the time represented by the time information 53. For example, the search result 54 for the broadcasting station "AAAA" contains a CD jacket image 54A, a program name - singer name 54B, and a CD sales price 54C. The CD jacket image 54A appears below a broadcasting station name and broadcasting frequency band information. The CD jacket

image 54A shows a jacket image of a CD that contains a musical piece that was broadcast at the time represented by the time information 53 from the broadcasting station "AAAA".

5 Below the CD sales price 54C, buttons 58, 59, and 60 appear as virtual operation buttons operated with a user interface of the gateway device 11. The buttons 58, 59, and 60 are in common with each broadcasting station that broadcast musical pieces. When the user operates the button 58, audio data of the musical piece is transmitted from the book mark search engine 10 to the gateway device 11. The audio data is processed by the audio processing means 39 and then reproduced from the speaker 90. When the user operates the button 58, the transmitted audio data is not stored to a predetermined storing device (for example, the hard disk 36).

10 With reference to the jacket image 54A, the musical piece name - singer name 54B, the audio data of the musical piece, and so forth, the user can select a desired musical piece from those that were broadcast from the registered broadcasting stations.

15 The button 59 is used when the user wants to purchase a CD that contains a desired musical piece. 20 The button 60 is used to download and store audio data of a desired musical piece to for example the hard disk 36. When the user purchases a CD or downloads audio

data using the button 59 or 60, the fee of the CD or audio data is charged to the credit card or bank card corresponding to the information that was input to the "card number" field 46 shown in Fig. 8.

5 In the example shown in Fig. 10, the buttons 58, 59, and 60 do not appear for the advertisement that was broadcast from the broadcasting station "CCCC". Alternatively, a button that allows the user to purchase a commodity item of the advertisement may be additionally placed.

10 When there are many registered broadcasting stations, search results may not appear at a time. In this case, by operating a button 61, information of other registered broadcasting stations appears.

15 In the above-described example, the book marker 4 was described as a dedicated device that stores time information. However, it should be noted that the present invention is not limited to such an example. For example, a portable communication device
20 such as a portable telephone unit or a PHS (Personal Handy Phone System) unit may be provided with the function of the book marker 4. The button 20 can be disposed on the device along with dial keys and so forth. The telephone number of the device can be used
25 as the terminal ID 27. In a combination of the dial keys, the function of the button 20 can be accomplished. Likewise, a GPS (Global Positioning

System) may be provided with the function of the book
marker 4. When a device such as a PHS unit or a GPS
unit that has a function for detecting the position
thereof is provided with the function of the book
marker 4, since the position of the user can be
located, broadcasting stations and so forth can be more
narrowly searched.

In addition, a small portable information
device referred to as PDA (Personal Digital Assistant)
can be used as the book marker 4. In this case, the
PDA is provided with the function of the book marker 4
as software. The PDA virtually operates as the book
marker 4.

In addition, a portable telephone unit that
can subscribe to an Internet connection service can be
used as the gateway device 11. For example, the book
marker 4 may be structured as a strap for holding a
portable telephone unit. In this case, one end of the
strap is structured as the connector 22. The other end
is connected to the portable telephone unit. A
portable telephone unit that can subscribe to an
Internet connection service is provided with a
connector that allows data to be transmitted to
Internet. When time information stored in the book
marker 4 structured as a strap is transmitted to the
portable telephone unit as the gateway device 11, the
connector 22 disposed at an end of the strap is

connected to a lower connector of the portable telephone unit. When the portable telephone unit is connected to Internet, time information can be easily transmitted from the gateway device 11 to the book mark search engine 10.

As a modification of the first embodiment, the button 20 can be accomplished with software on the gateway device 11. The function of the button 20 for storing time information is assigned to a predetermined key of the gateway device 11 or a predetermined position of the display screen thereof. Likewise, the function of the button 20 may be assigned to a predetermined icon on the display screen of the gateway device 11. When an icon assigned the function of the button 20 is operated by a pointing device such as a mouse, time information can be stored. The terminal ID 27 is stored to a predetermined area of the ROM 32, the RAM 33, or the hard disk 36 of the gateway device 11.

When the user operates an icon assigned as the button 20 on the gateway device 11, time information that represents the time at which the icon was operated is stored to a predetermined area of the RAM 33 or the hard disk 36. The time information is read from the RAM 33 or the hard disk 36 and transmitted along with the terminal ID 27 to the book mark search engine 10 through the communication line 8. The book mark search engine 10 searches the database

corresponding to the transmitted information and transmits search results from the book mark search engine 10 to the gateway device 11 through the communication line 8.

5 When the searching operation is performed by the book mark search engine 10, a unique terminal ID 27 is supplied to each book marker 4. Corresponding to the terminal ID 27 and time information, since the user name and the musical piece name that he or she downloaded are obtained and used for market research.

10 Next, practical examples of the book marker 4 will be described. As long as the book marker 4 can store time information at user's desired timing, various modifications are available.

15 Figs. 11A and 11B show an example of the book marker 4. As shown in Fig. 11A, in this example of the book marker 4, cut portions 101 and 102 are formed at both ends of the book marker 4. When a string or a chain is connected to the cut portion 101 or 102, the user can wear the book marker 4 as a pendant. The displaying portion 21 is disposed at an almost center position of the book marker 4. The button 20 is disposed below the displaying portion 21.

20 The cut portion 101 composes a cap 103. The connector 22 that is connected to the gateway device 11 is housed in the cap 103. When the cap 103 is pulled upward, as shown in Fig. 11B, the cap 103 is separated

from the main body of the book marker 4. Thus, the connector 22 is exposed. In other words, the connector 22 directly protrudes from the main body of the book marker 4. In this example, the interface 29 of the book marker 4 is an interface corresponding to USB. The connector 22 is a male USB connector.

Since the connector 22 directly protrudes from the main body of the book marker 4, when the connector 22 of the main body of the book marker 4 is inserted into a female connector of the interface 37 of the gateway device 11, the book marker 4 can be connected to the gateway device 11. If an A type USB connector is used, the compatibility between the book marker 4 and the gateway device 11 as a personal computer can be preferably maintained.

Depending on the structure around the connector of the gateway device 11, the main body of the book marker 4 may not be physically connected to the gateway device 11. Thus, in this case, a connecting device that has a female USB connector and a connecting line for the gateway device 11 is used. The connecting device is referred to as cradle. Fig. 12 shows an example of the appearance of the cradle 110 to which the book marker 4 has been connected.

The cradle 110 is formed in a semi-sphere shape. At the vertex portion of the cradle 110, a

female connector 111 corresponding to the connector 22 (male connector) of the book marker 4 is disposed. It should be noted that the shape of the cradle 110 is not limited to such a semi-sphere. In other words, according to the preset invention, the shape of the cradle 110 may be rectangular parallelepiped, quadrangular pyramid, or any complicated shape. A connecting line 112 extends from the female connector 111. The connecting line 112 is used to connect the cradle 110 to the gateway device 11.

By connecting the connecting line 112 to a predetermined connector of the gateway device 11, inserting the connector 22 of the book marker 4 into the female connector 111 of the cradle 110, and then mounting the book marker 4 to the cradle 110, time information stored in the memory 26 of the book marker 4 can be transmitted to the gateway device 11.

Entries of time information stored in the book marker 4 appear as ball shaped members 100, 100, 100, ... and 100' under the control of the CPU 25. As was described above, the book marker 4 generates category information corresponding to time information that depends on the operating method of the button 20. The time information and the category information can be stored in the memory 26. The category information can be affected to the time information that appears on the displaying portion 21.

In the example, as shown in Figs. 11A and 11B, black ball shaped members 100 and white ball shaped members 100' represent category information. A black ball shaped member 100 represents an operation of the button 20 corresponding to a radio broadcast. A white ball shaped member 100' represents an operation of the button 20 corresponding to a television broadcast. Another member (not shown) represents an operation of the button 20 corresponding to out-of-area.

Of course, entries of time information may appear as other members, not black and white ball shaped members. For example, entries of time information may appear as a number. In addition, the number of entries of time information that can be stored to the book marker 4 may appear.

Members that appears on the displaying portion 21 may vary when entries of time information stored in the memory 26 of the book marker 4 are transmitted to the gateway device 11. Figs. 13A, 13B, and 13C show an example of members that appear on the displaying portion 21 in the case that entries of time information are being transmitted to the gateway device 11. Figs. 13A, 13B, and 13C show the case that the cap 103 shown in Figs. 11A and 11B faces downward. Figs. 13A, 13B, and 13C show states that time passes. In Fig. 13A, seven ball shaped members 100 and 100'

successively disappear as they are sucked toward the connector 22 as time passes. Thus, a situation of which data stored in the memory 26 is transmitted to the gateway device 11 through the connector 22 appears as a virtual image.

Such an virtual image may appear on the gateway device 11. When an audio reproducing portion is disposed in the gateway device 11, a sound can be output as members vary and time passes. Actually, time information is transmitted in much shorter time than members that disappears on the displaying portion 21. In other words, it is not necessary to synchronize the real data transmission speed with the speed of members that disappear on the displaying portion 21. When entries of time information stored in the memory 26 are transmitted, as time passes, members decrease and/or a sound takes place. Thus, the user can visually know that entries of time information are being transmitted to the gateway device 11.

While entries of time information are being transmitted, they can be represented in various manners. For example, a predetermined character image may appear on the gateway device 11. In addition, members that appears on the displaying portion 21 of the book marker 4 can be synchronized with members that appear on the gateway device 11 so that the user can see a sequence of entries of time information

transmitted from the book marker 4 to the gateway device 11.

5 Figs. 14A and 14B show a modification of the book marker 4. The book marker 4 shown in Figs. 14A and 14B is different from the book marker 4 shown in Figs. 11A and 11B in that the lower cut portion 102 is not formed. Fig. 14A shows the state that the cap 103 has been mounted. Fig. 14B shows the state that the cap 103 has been dismounted and the connector 22 has been exposed. In the modification shown in Figs. 14A and 14B, the button 20 can be pressed from the bottom.

10 Figs. 15A and 15B show another modification of the book marker 4. The book marker 4 shown in Figs. 15A and 15B is different from the book marker 4 shown in Figs. 11A and 11B in that members that represent entries of time information of the displaying portion 21 are formed as bars 120. Fig. 15A shows the state that the cap 103 has been mounted. Fig. 15B shows the state that the cap 103 has been removed and the connector 22 has been exposed.

20 Figs. 16A and 16B show another modification of the book marker 4. The book marker 4 shown in Figs. 16A and 16B is different from the book marker 4 shown in Figs. 11A and 11B in that the cut portions 101 and 102 are omitted and a slide-proof portion 130 is disposed. The slide-proof portion 130 is formed on the side of the main body of the book marker 4 and composed

of for example rubber. In this example, an area 131 of the displaying portion 21 represents entries of time information. Fig. 16A shows the state that the cap 103 has been mounted. Fig. 16B shows the state that the cap 103 has been dismounted and the connector 22 has been exposed.

Fig. 17 shows another modification of the book marker 4. In this modification, a ring 150 is disposed to the cap 103 of the book marker 4. In the state that the cap 103 has been mounted to the book marker 4, it can be used as for example a key holder.

The book marker 4 as each of the modifications shown in Figs. 14A, 14B, 15A, 15B, 16A, 16B, and 17 may be mounted to the cradle 110.

Fig. 18 shows another modification of the book marker 4. In this modification, the book marker 4 is formed in a wrist band shape. The displaying portion 21 is composed of a plurality of lighting portions for example LEDs (Light Emitting Diodes) that light corresponding to entries of time information that are stored. All lighting portions may be initially lit. As the number of entries of time information that are stored increases, the number of the lighting portions that light may decrease. A connecting line 140 protrudes from one end of the main body of the book marker 4. The connector 22 is disposed at a tail of the connecting line 140. A structure that allows the

connector 22 to be connected and disconnected is disposed at a head of the main body of the book marker 4. When the connector 22 is connected to the head of the book marker 4, it is formed in a ring shape.

5 Fig. 19 shows another modification of the book marker 4. The book marker 4 shown in Fig. 19 is used as a desk top device such as a table clock. The button 20 is disposed at an upper position of the book marker 4. The displaying portion 21 is disposed on the front surface of the book marker 4. In this
10 modification of the book marker 4, entries of time information that were stored appear as square members 160 and 160'. For example, a black square member 160 represents an entry of time information corresponding to a radio broadcast. A white square member 160'
15 represents an entry of time information corresponding to a television broadcast. The square members 160 and 160' appear at random positions. The connector 22 connected to the gateway device 11 is disposed on a
20 rear surface (not shown) of the book marker 4. In this modification of the book marker 4 shown in Fig. 19, a female USB connector may be disposed on the book marker 4. With a connecting line having two male connectors, the book marker 4 may be connected to the gateway
25 device 11.

 The maximum number of entries of time information that are stored to the book marker 4 may be

limited. For example, in consideration of searching operations that will be performed later, the number of entries of time information that can be stored to the book marker 4 may be designated to several entries to ten and several entries as an upper limit. In this case, a proper means for informing the user that the number of entries of time information becomes or approaches the upper limit is preferably disposed. For example, a sound generating means that generates a beep sound may be disposed to the book marker 4. With such a sound generating means, when the number of entries of time information that can be stored to the book marker 4 becomes one, an alarm sound may be generated. When the number of entries of time information that can be stored to the book marker 4 is zero, an alarm sound is generated when the button 20 is pressed.

A sound generated by the sound generating means is not limited to such an alarm sound. For example, whenever the user operates the button 20 of the book marker 4, a predetermined sound may be generated. Thus, the user can know whether or not the operation of the button 20 was acknowledged without need to see the displaying portion 21 of the book marker 4. In addition, a sound that varies corresponding to the operating method of the button 20 may be generated.

A cancel button may be disposed to the book

marker 4. With the cancel button, entries of time information that were stored can be erased in the order of the oldest entry or the latest entry.

Alternatively, the user can designate an entry to be
5 deleted from those of time information that were stored.

Besides the above-described examples, the book marker 4 can be built in various electronic devices. For example, the book marker 4 can be built in a radio receiver. In addition, the book marker 4
10 can be built in a car stereo system. Of course, devices in which the book marker 4 is built are not limited to electronic devices. The book marker 4 is preferably built in a device that can be used as a
15 mobile unit.

In the above-described examples, the button
20 is disposed as one operating portion for causing time information to be stored to the book marker 4. By operating the button 20 in various manners, a plurality of category flags are generated. However, it should be noted that the present invention is not limited to such examples. Instead, a plurality of buttons may be
25 disposed to the book marker 4. Different flags may be assigned to these buttons. For example, a button 20 for a radio broadcast and a button 20' for a television broadcast may be disposed. In addition, in a combination of a plurality of buttons, much more

category flags can be generated.

5 The operating portion for storing time information of the book marker 4 is not limited to a push button. Alternatively, a rotating switch that rotatably selects one of contacts may be disposed to the book marker 4. With the rotating switch, time information may be stored. Alternatively, a touch sensor that defects a touching of the user may be used as the operating portion.

10 In the above-described examples, the book marker 4 and the gateway device 11 are connected through an interface such as USB that allows data to be transmitted to a computer system. However, it should be noted that the present invention is not limited to such an example. In other words, since the amount of data transmitted from the book marker 4 to the gateway device is very small, an interface having the lowest data transmission rate can be used. For example, data can be transmitted using a conventional shield cable that is used for a head set.

15 In addition, the book marker 4 can be accomplished as software of a personal computer. In this case, a personal computer as the book marker 4 may be additionally used. Alternatively, when the gateway device 11 is a personal computer, the gateway device 11 can be used as the book marker 4. Software that accomplishes the book marker 4 on the personal computer

can be downloaded from a communication network such as Internet. Of course, such software can be distributed or sold using a record medium such as a CD-ROM.

Such software may be obtained from another web site through the book mark search engine 10 connected to the gateway device 11. Alternatively, such software may be stored in the book mark search engine 10. In this case, the software may be directly downloaded from the gateway device 11. When the user performs a particular operation on a personal computer that executes the software that accomplishes the book marker 4, time information is stored.

Alternatively, the program that causes the book marker 4 to operate may be downloaded. For example, in the book marker 4, the ROM 91 is composed of an EEROM (Electrically Erasable Programmable ROM) that allows stored contents to be electrically rewritten. The program that is supplied from the gateway device 11 or the like through the interface 29 is stored to the ROM 91.

Thus, in the initial state, the program is not stored to the ROM 91. The program is written to the ROM 91 corresponding to a predetermined procedure. As a result, the book marker 4 can be used.

When the user of the book marker 4 is registered, the book marker 4 is connected to the gateway device 11. The terminal ID 27 is transmitted

from the book marker 4 to the book mark search engine 10 through the gateway device 11. After the user of the book marker 4 has been correctly registered, a program for controlling the operation of the book marker 4 is transmitted from the book mark search engine 10 to the gateway device 11. This program is transmitted from the gateway device 11 to the book marker 4 through the interface 29. The transmitted program is written to the ROM 91. As a result, the book marker 4 can be used.

Alternatively, a startup program for the CPU 25 and a communication control program for the interface 29 can be pre-stored to the ROM 91.

When the ROM 91 is rewritable, the version of the operation control program of the book marker 4 can be updated. For example, a program is downloaded from the network connected to the gateway device 11. The downloaded program is transmitted to the book marker 4. As a result, the contents stored in the ROM 91 are rewritten.

When the transmitted program can be selected by the user, members that appear on the displaying portion 21 can be preferably selected by the user.

The operation control program for the book marker 4 can be transmitted from another site that can be connected to the gateway device 11 as well as the book mark search engine 10.

The control program for the book marker 4 can be distributed using a record medium such as a CD-ROM or a floppy disc, instead of downloading from the network. The program recorded in such a record medium is read by the gateway device 11. The program is transmitted to the book marker 4. As a result, the contents stored in the ROM 91 are rewritten.

Next, another modification of the first embodiment of the present invention will be described. According to the modification, in addition to user's personal computer, an information terminal unit that is installed at a retail store is used as the gateway device 11.

Such information terminal units are installed at relatively large CD stores and so-called convenience stores. The information terminal unite are connected to a predetermined network. When the user operates such an information terminal unit corresponding to a menu displayed on the screen thereof, he or she can obtain desired information. The user can see the obtained information and obtain it with a record medium such as a floppy disk or a CD-ROM. In addition, the information terminal unit is provided with a predetermined interface. The obtained information can be directly transferred to user's information device through a relevant interface. Hereinafter, such an information terminal unit is referred to as "kiosk

terminal unit".

Since a kiosk terminal unit can be accomplished with almost the same structure as a conventional computer as shown in Fig. 7, the description of the structure of the kiosk terminal unit is omitted. The kiosk terminal unit has a bus to which a CPU and a memory are connected. In addition, a displaying device and an input interface that accomplish GUI (Graphical User Interface) are connected to the bus. The kiosk terminal unit also has a large storage medium such as a HDD, a data outputting means, a network connecting means, and so forth.

The kiosk terminal unit is connected to the above-described book mark search engine 10 (the connection is not shown). The kiosk terminal unit is provided with an interface corresponding to the connector 22 of the book marker 4 so that data can be transmitted between the book marker 4 and the kiosk terminal unit. With the kiosk terminal unit, the user can use the searching service using the book marker 4 regardless of whether he or she has the gateway device 11.

The kiosk terminal unit can be always connected to a high speed communication line that has a higher transmission rate than a conventional home-use network. The kiosk terminal unit can have larger storage mediums (that are a memory and a HDD) than

user' personal computer. Thus, when the user uses a kiosk terminal unit, he or she can have a different service from that in the case that a personal computer is used as the gateway device 11.

5 For example, the book marker 4 is provided with a memory having a relatively large storage capacity. The book marker 4 is connected to a kiosk terminal unit. Corresponding to time information stored in the memory 26, music data is searched with the kiosk terminal unit. The kiosk terminal unit displays a screen as shown in Fig. 10. When the kiosk terminal unit has an audio reproducing means, by operating the button 58, the user can listen to music data as search results.

10 By operating the button 60, the user can download music data as search results to the book marker 4 through the connector 22. In the case that the music data is charged, when the user pays a designated fee through a money slot, the music data as the search results is downloaded to the book marker 4. The user transfers the downloaded music data from the book marker 4 to a personal computer or a dedicated music data reproducing apparatus. When music data that is downloaded is compression-encoded corresponding to a predetermined compression encoding method, the memory storage space and download time can be preferably reduced.

As examples of the compression encoding method for music data, MP3 (Moving Picture Experts Group 1 Audio Layer 3), ATRAC (Adaptive Transform Acoustic Coding), ATRAC2, ATRAC3 (that are
5 modifications thereof) and so forth can be used. As other examples of the compression encoding method, PASC (Precision Adaptive Sub-band Coding), Twin VQ (trademark), Real Audio (trademark), Liquid Audio (trademark), and so forth can be used.

10 When the book marker 4 is provided with a decoder and a audio reproducing means corresponding to a predetermined music data compression encoding method, music data that has been downloaded and stored to the memory can be decoded and reproduced. Thus, the user
15 can enjoy listening to downloaded music data. An example of the audio reproducing means is an audio reproducing system using a head set and so forth.

When music data is directly downloaded to the book marker 4, there may be a problem about copyright.
20 This problem can be solved by using an encrypting system. In the encrypting system, music data is pre-encoded corresponding to a predetermined encoding method. The book marker 4 has a decrypting portion that decrypts encrypted music data. Encrypted music
25 data is decrypted only when it is reproduced by the book marker 4. Even if music data downloaded to the book marker 4 is transmitted to a personal computer or

the like, the music data cannot be decrypted unless the user has a decrypting key that can be used by the personal computer.

5 In addition, when a retail store that has a kiosk terminal unit sells music CDs, the kiosk terminal unit may issue an order sheet as a search result corresponding to time information stored in the book marker 4. The user can hand the order sheet to a clerk of the store and buy a music CD corresponding to the search result. When the kiosk terminal unit is provided with a cart system that conveys music CDs, the kiosk terminal unit can directly vend a music CD corresponding to a search result.

10 Next, a searching process for music data corresponding to time information stored in the book marker 4 and a purchasing process for a music CD corresponding to the search result according to the above-described embodiments will be described in a practical manner. Figs. 20 and 21 are a first part and a second part of a flow chart showing a process performed after the user is registered to the book marker 4 until a music CD is purchased. Figs. 22 to 27 show examples of display screens displayed on the gateway device 11 corresponding to the flow chart shown in Figs. 20 and 21. "A" and "B" shown in Fig. 20 are connected to "A" and "B" shown in Fig. 21, respectively.

When the user uses the book marker 4, the user should register himself or herself to it. In Fig. 20, at step S30, it is determined whether or not the user has been registered. When the determined result at step S30 is Yes (namely, the user has been registered), the flow advances to step S33. When the determined result at step S30 is No (namely, the user's book marker 4 has not been registered), the flow advances to step S31. At step S31, the book marker 4 is connected to the gateway device 11. At step S32, the user is registered to the book marker 4 by a predetermined operation of the gateway device 11. The gateway device 11 may be user's personal computer or an above-described kiosk terminal unit. After the user has been registered to the book marker 4, the flow advances to step S33.

When the determined result at step S30 is Yes (namely, the user has been registered to the book marker 4), the flow advances to step S33. At step S33, the book marker 4 is operated by the user. In other words, when the user is listening to his or her favorite musical piece, he or she presses the button 20. As a result, time information at which the user pressed the button 20 is stored to the book marker 4. As was described above, depending on in what manner the button 20 was pressed, time information that is stored in the book marker 4 is categorized (at step S34).

When time information is stored out of the registered area, the user continuously presses the button 20 for a predetermined time period or longer (at step S35). To store time information corresponding to a radio broadcast to the book marker 4, the user momentarily presses the button 20 once (at step S36). To store time information corresponding to a television broadcast to the book marker 4, the user presses the button 20 twice in a predetermined time period (at step S37). Thereafter, the flow advances to step S38. At step S38, the time information at which the button 20 was pressed, identification information, and the category flag that represents the operating manner of the button 20 are stored to the memory 26 of the book marker 4.

When at least one entry of time information has been stored in the memory 26 of the book marker 4, the entry of the time information can be extracted from the memory 26 and a musical piece can be searched by the bookmark search engine 10 corresponding to the entry of the time information (at step S39). When the determined result at step S39 is Yes (namely, a musical piece is searched corresponding to time information), the flow advances to step S40. When the determined result at step S39 is No (namely, time information is further stored to the book marker 4), the flow returns to step S33.

As was described above, the searching operation using time information stored in the book marker 4 is performed when the book marker 4 is connected to user's personal computer (PC) or a kiosk terminal unit as the gateway device 11. When the user performs the searching operation using his or her personal computer as the gateway device 11, the flow advances to step S41. At step S41, the book marker 4 is connected to the personal computer. In addition, the personal computer is connected to for example Internet. At step S42, the book marker 4 is connected to an available web site at which the bookmark search engine 10 can be used.

Time information stored in the memory 26 of the book marker 4 is transmitted to the personal computer. Fig. 22 shows an example of a time information selection screen 200 that is displayed on the personal computer when time information has been transmitted thereto. In this example, entries (1) to (9) of time information stored in the book marker 4 are transmitted to the personal computer. The stored date and time of each of the entries (1) to (9) of the time information appear as members 201 to 209.

The user selects desired information from the members 201 to 209. For example, the user selects one of the members 201 to 209 using a pointing device such as a mouse and a cursor that moves on the screen

corresponding to the movement of the mouse. By clicking a mouse button, the user confirms the selected information. In addition to the terminal ID 27 of the book marker 4, the selected information is transmitted from the personal computer to the book mark search engine 10. The transmission data is composed of the terminal ID 27 as a header and a pair of an entry of time information and a category flag thereof.

The book mark search engine 10 searches title information of musical piece that were broadcast from registered broadcasting stations corresponding to the time information and the terminal ID 27 that were transmitted. At this point, corresponding to the category flag transmitted along with the time information, title information is searched from radio stations or television stations. When title information is searched from television stations, musical pieces of music program, musical pieces of commercials, theme songs of dramas and musical pieces in dramas may be searched.

When the category flag represents out-of-area, title information is searched from musical pieces that were broadcast from broadcasting stations out of the registered area represented by user's zip code corresponding to the terminal ID 27.

Search results obtained by the book mark search engine 10 are transmitted to the personal

computer. Fig. 23 shows an example of a search result display screen 210 displayed on the personal computer corresponding to transmitted search results. In this example, in Fig. 22, the user selects the entry (2) of time information that appears as the member 202. The book mark search engine 10 searches musical piece information corresponding to the selected entry (2) of time information. As search results, musical piece information 211, 212, and 213 appear on the search result display screen 210.

In other words, the search results show that musical pieces represented by the musical piece information 211, 212, and 213 were broadcast from broadcasting stations "AAAA", "ABCD", and "BBBB" at 12:00 am on October 18, 1999 as the entry (2) of time information, respectively. Thus, it is supposed that the user listened to one of these musical pieces and operated the button 20 of the book marker 4 at the time represented by the entry (2) of the time information.

When the user operates the button 20 of the book marker 4, it should be noted that he or she does not always operate the button 20 just when he listens to his or her favorite musical piece. In other words, there may be a situation of which after the user had listened his or her favorite musical piece, he operated the button 20. Thus, it is preferable to consider a proper margin for a broadcast time in searching musical

piece information. In this case, as represented with a member 217, musical piece information for two musical pieces appears.

With reference to the musical piece information 211, 212, and 213 on the search result display screen 210, the user determines whether there is a musical piece he or she listened at the time represented by the entry (2) of the time information stored in the book marker 4 (at step S43). When the user wants to listen to a demonstration of the selected musical piece, he or she operates a LISTEN button 214 that appears at each of the musical piece information 212, 213, and 214 (at step S45). When the user operates the LISTEN button 214, a demonstration listening screen 220 that allows the use to listen to a demonstration of the selected musical piece appears. Fig. 24 shows an example of the demonstration listening screen 220.

When the user operates the LISTEN button 214, the personal computer transmits information that represents what button 215 was pressed to the book mark search engine 10. In this example, it is assumed that the LISTEN button 214 of the musical piece information 213 was operated. The book mark search engine 10 searches information of a music CD that contains a musical piece corresponding to the transmitted information from the database 1. The searched

information is transmitted to the personal computer.
For example, additional information of the music CD
such as musical piece names thereof appears as a list
in a CD information display portion 221 on the
5 demonstration listening screen 220.

In the example shown in Fig. 24, an operating
portion for controlling a reproducing operation of a
musical piece appears on the right of the CD
information display portion 221. When the user
operates a PLAY button 222, he or she can listen to a
10 demonstration of a musical piece corresponding to the
LISTEN button 214. When the user operates the PLAY
button 222, information that represents that the user
pressed the PLAY button 222 is transmitted to the book
15 mark search engine 10. Music data is pre-stored in the
database 1. Music data corresponding to the selected
musical piece information is transmitted from the book
mark search engine 10 to the personal computer.

Music data may be transmitted from another
20 web site connected to the book mark search engine 10
through a network.

The user listens to a demonstration of
transmitted music data with the audio processing means
39 and the speaker 90 disposed in the personal computer
25 (at step S46). In Fig. 24, an operating portion 223 is
a volume slider with which the audio volume of the
reproduced sound can be adjusted. When the user

listens to a demonstration of a musical piece, the reproduction length of the play time is limited. For example, only 15 seconds from the beginning or a principal portion of a musical piece are preferably reproduced.

In the flow chart shown in Fig. 21, it is determined whether or not a desired musical piece has been searched at step S43. Thereafter, the musical piece is demonstrated at step S45. Alternatively, after a musical piece is demonstrated, it may be determined whether or not a desired musical piece has been obtained. When desired musical piece information cannot be obtained as a search result at step S43, a search condition may be manually designated at step S44. Thus, desired musical piece information can be obtained.

The user wants to purchase a desired musical piece from the musical piece information 211, 212, and 213 as the search results (at step S47). This operation is performed as a result of the demonstration at step S46 or directly from the musical piece information 211, 212, and 213 that appear. The user purchases a musical piece with a music CD that contains the musical piece (as will be described later). Alternatively, the user may purchase a single musical piece rather than a music CD that contains it.

When the user does not want to purchase a

searched musical piece at once, he or she can purchase it later (at step S48). In this case, the search results can be stored in the web site of the book mark search engine 10 (at step S49). When the user operates a SAVE button 215 of each of the musical piece information 211, 212, and 213 on the demonstration listening screen 220 or a SAVE button 224 on the demonstration listening screen 220, musical piece information as search results is stored along with user information such as terminal ID 27 to the database 2 of the book mark search engine 10.

When the user operates the SAVE button 214 or the SAVE button 224, a save screen 230 shown in Fig. 25 appears. The save screen 230 contains a list of information 231 of musical pieces that were saved. On the save screen 230, when the user operates a Listen button 233, he or she can listen to a demonstration of the selected musical piece. When the user operates a Buy button 232, he or she can order the selected musical piece. When the user operates a Delete button 234, he or she can delete the information of the selected musical piece on the save screen 230.

When the user operates a BUY button 216 on the search result display screen 210, a BUY button 225 on the demonstration listening screen 220, or the Buy button 232 on the save screen 230, he or she can order the selected musical piece. The information of the

ordered musical piece is correlated with the user information such as the terminal ID 27. The resultant information is temporarily stored to a predetermined memory area of the book mark search engine 10 (at step S50). This memory area is referred to as shopping cart.

Fig. 26 shows an example of a shopping cart screen 240 on which the contents of a shopping cart appear. On the shopping cart screen 240, a list 241 of information of musical pieces contained in the shopping cart and music CDs that contain the musical pieces appears. On the shopping cart screen 240, the user can select a vender from which he or she will purchase the selected music CD (at step S51). In this example, on the shopping cart screen 240, a plurality of vendors appear. When the user operates one of buttons 242A, 242B, and 242C, the personal computer is connected to a web site of the selected vendor at which he or she can purchase the selected music CD.

When the user operates a button 243, an edit screen (not shown) appears. On the edit screen, the user can add or delete a vender of music CDs.

Next, the case that the user operated the button 242C will be described. When the user operated the button 242C, the personal computer is connected from the web site of the book mark search engine 10 to a "CD SHOP C" web site (at step S52). Fig. 27 shows a

purchase screen 250 in the case that the personal computer is connected to the "CD SHOP C" web site. In this example, on the purchase screen 250, an upper area and a lower area appear. The upper area is a screen 251 on which the web site of the book mark search engine 10 appears. The lower area is a screen 252 on which the "CD SHOP C" web site appears.

Data stored in the shopping cart of the book mark search engine 10 is directly transmitted as a purchase item list 253 to the "CD SHOP C" web site. The user decides whether or not the prices of the music CDs are proper corresponding to price information of the music CDs on the list 253 (at step S53). When the prices are proper, the user orders the music CDs in the purchase item list 253. When the user operates the BUY buttons 254A, 254B, 254C, and 254D, he or she can order and purchase the respective music CDs from the "CD SHOP C". The fees of the music CDs can be charged to the credit card that is pre-registered to the "CD SHOP C".

When the fees of the music CDs are not proper, the process is completed. Alternatively, as denoted by a dotted line in Fig. 21, the flow returns to step S51. At step S51, on the shopping cart screen 240, the user can select another vendor.

When the user selected a kiosk terminal unit at step S40, he or she connects the book marker 4 to a predetermined connection terminal of the kiosk terminal

unit through the connector 22 (at step S55). The time information, the identification information, the category flag, and the terminal ID 27 are transmitted from the book marker 4 to the kiosk terminal unit. The kiosk terminal unit searches musical piece information corresponding to the transmitted information, displays search results to the user through a predetermined GUI (Graphical User Interface), and asks whether the user wants to listen to a demonstration of the selected music CD or purchase it.

When the desired musical piece and musical piece information have been found (at step S56), the flow advances to step S53. At step S53, the user decides whether or not the fee of the music CD that contains the desired musical piece is proper. When the fee is proper, the user purchases the music CD. When the kiosk terminal unit is installed in a CD store, the user can purchase the desired music CD corresponding to the search result in the CD store.

Next, a second embodiment of the present invention will be described. According to the first embodiment of the present invention, the book mark search engine 10 searches only musical pieces that were broadcast from radio broadcasting stations and television broadcasting stations. In contrast, according to the second embodiment of the present invention, commodity items in commercials that were

broadcast from television broadcasting stations are also searched.

Fig. 28 shows an example of the structure of a searching system according to the second embodiment of the present invention. In Fig. 28, similar portions to those in Fig. 2 are denoted by similar reference numerals and their description is omitted. According to the second embodiment of the present invention, since commodity items commercials that were broadcast are searched, there is an advertizer 500. The advertizer 500 may request for example an advertizing agent 502 to produce a commercial to be broadcast. The advertizing agent 502 may supply the created commercial to a broadcasting station 12.

The advertizer 500 has a web site 501 on Internet. At the web site 501, the advertizer 500 guides commodity items advertized in the commercial. In addition, the user can purchase the advertized commodity items from the web site 501. The web site 501 can be accessed from the gateway device 11.

In the book mark search engine 10, the database 1 shown in Fig. 2 corresponds to a broadcast contents database 1'. In addition, the database 2 corresponds to a customer database 2'. The broadcast contents database 1' stores a play list that contains broadcast time of programs that are broadcast from the broadcasting station 12. The play list may contain

information about only commercials that are broadcast from the broadcasting station 12.

The broadcast contents database 1' also stores the URL of the web site 501 of the advertizer 500 and the name of the advertizer 500 in correlation with the play list. In addition, the broadcast contents database 1' stores the names of the advertized commodity items in correlation with the broadcast time. In other words, when the broadcast contents database 1' is searched with a key of a broadcast time, the name of the advertizer 500, the URL of the web site 501 of the advertizer 500, and the name of the commodity item advertized in the commercial that was broadcast at the broadcast time can be obtained as search results.

As with the first embodiment of the present invention, according to the second embodiment, the customer database 2' stores the terminal ID 27 and the user data of each book marker 4. In addition, the customer database 2' can store information about user's favorites such as user's favorite radio stations and television stations registered corresponding to the terminal ID 27.

According to the second embodiment of the present invention, an interface 503 is disposed in the book mark search engine 10. The interface 503 allows predetermined information stored in the broadcast contents database 1' to be easily updated from the

outside. For example, the advertizer 500 can update information about commercials in the play list stored in the broadcast contents database 1' through the interface 503. Such information can be updated through the advertizing agent 502 on behalf of the advertizer 500. The play list that represents contents that are broadcast by the broadcasting station 12 can be updated through the interface 503 by the broadcasting station 12.

The interface 503 can be structured with a database management system having a predetermined filter that prohibits the broadcast contents database 1' from being accessed from an authorized person. The interface 503 is preferably provided with a GUI that allows an external authorized client to easily update the contents of the broadcast contents database 1'.

In such a structure, when the user watched a commercial that he or she wants to know or in which he or she is interested, he or she operates the button 20 of the book marker 4 so as to store time information to the memory 26 of the book marker 4. Thereafter, the user connects the book marker 4 to the gateway device 11 so as to transmit time information stored in the memory 26 from the book marker 4 to the gateway device 11 along with the terminal ID 27. The time information and the terminal ID 27 are transmitted from the gateway device 11 to the book mark search engine 10.

The book mark search engine 10 identifies the user using the transmitted terminal ID 27 and searches the broadcast contents database 1' corresponding to the time information. The name of the advertizer 500, the URL of the web site 501 of the advertizer 500, the name of the commodity item of the commercial that was broadcast, and so forth are transmitted to the gateway device 11.

The user can obtain necessary information about the commercial that was broadcast at the time represented by the time information stored in the book marker 4 corresponding to the name of the advertizer 500, the URL of the web site 501 of the advertizer 500, and information such as the name of the commodity item that was broadcast in the commercial. In addition, since the user can know the URL of the web site 501 of the advertizer 500, he or she can access the web site 501 using the gateway device 11. Thus, the user can obtain detailed information about the commodity item and information of other commodity items with which the advertizer 500 deal.

When the web site 501 allows the user to purchase commodity items, he or she can order a desired commodity item to the advertizer 500 using the gateway device 11.

When the customer database 2' stores information about the user's favorites, the advertizer

500 can know favorites of the user who accessed the web site 501 by searching the customer database 2'. Thus, the advertizer 500 can provide the user with relevant information.

5 According to the first embodiment of the present invention, when the user presses the button 20 twice in a predetermined time period, the category flag represents a television broadcast. Thus, the book mark search engine 10 can determine that time information stored is for a television broadcast. In other words, the searching system according to the second embodiment and the musical piece data searching system can be accomplished at a time.

10 For example, when a first operating portion that stores time information for a radio broadcast and a second operating portion that stores time information for a television broadcast are disposed, a category flag for a musical piece and a category flag for a commercial are generated. The book mark search engine 15 10 can determine whether the user wants to know information of a musical piece in a commercial or information of a commodity item advertized in a commercial corresponding to stored time information.

20 According to the second embodiment of the present invention, there may be money flows among the advertizer 500, the broadcasting station 12, the book mark search engine 10, and the user. Fig. 29 shows

money flows that may take place according to the second embodiment.

First of all, an advertisement broadcasting fee M1 takes place between the broadcasting station 12 and the advertizer 500. The advertisement broadcasting fee M1 moves from the advertizer 500 to the broadcasting station 12. When the user accesses the web site 501 of the advertizer 500 corresponding to information obtained by the book mark search engine 10 and purchases a commodity item therefrom, a service fee M2 of the book mark search engine 10 takes place. The service fee M2 moves from the advertizer 500 to the book mark search engine 10. Corresponding to information obtained from the book mark search engine 10, when the user just accesses the web site 501, the service fee M2 may take place. In addition, when the user accesses the web site 501 with information obtained from the book mark search engine 10 and purchases a commodity item from the advertizer 500, the user pays a fee M3 for the commodity item to the advertizer 500.

As was described above, according to the present invention, when a button disposed on a book marker is pressed, information representing time at which the button was pressed is stored to the book marker. When the information representing time is transmitted to a book mark search engine, information

of contents that were being broadcast at the time of which the button was pressed is obtained from the book mark search engine. The book mark search engine has a first database that stores play lists that
5 correlatively contain contents of broadcasting stations and broadcast time thereof and a second database that correlatively stores the contents and additional information thereof.

10 According to a first embodiment of the present invention, when information representing time stored in the book marker is transmitted to the gateway device, the transmission of the information is graphically displayed using a GUI. Thus, the user can visually know that information stored in the book mark
15 is being transmitted to the gateway device. In addition, the user can visually enjoy the transmission state of the information.

20 According to the first embodiment of the present invention, the user can listen to a demonstration of a musical piece that he or she selected from search results searched by the book mark search engine representing time stored in the book marker using the gateway device. Thus, the user can directly know contents that were being broadcast when
25 he or she stored information to the book marker.

In addition, according to the present invention, when the user performs a predetermined

operation for the gateway device corresponding to search results that the book mark search engine searched using information representing time stored in the book marker, the user can access a site at which he or she can purchase the contents. Thus, the user can purchase his or her favorite commodity item even if he or she knows only fragmental information thereof.

In addition, according to the present invention, as search results that the book mark search engine searched using information representing time stored in the book marker, contents that were being broadcast at the time stored in the book marker and contents that were being broadcast earlier than those are obtained. Thus, the operation of the book marker can be performed with a proper margin.

In addition, according to the present invention, since the book mark search engine is provided with an interface that allows information stored in a database to be changed from the outside, the contents of the database can be easily changed by an advertizer, an advertizing agent, and a broadcasting station. Thus, the contents can be flexibly changed.

In addition, according to the present invention, since the main body of the book marker is provided with a dedicated connector that allows data to be exchanged with the outside, information stored in the book marker can be transmitted without need to use

an extra cable. Thus, even if a gateway device installed in a retail store or a public facility is used, it is not necessary for the user to carry a connection cable.

5 In addition, according to the present invention, when one button disposed in the book marker is operated in different manners, a plurality of types of identification information are generated. Thus, the book marker can categorically store information representing time at which a musical piece was being broadcast from a radio broadcasting station, information representing time at which a musical piece was being broadcast from a television broadcasting station, and information representing time at which commodity information was being broadcast from a television broadcasting station.

10 According to the embodiments of the present invention, since the book marker is formed in a pendant shape, a wrist band shape, a key holder shape, or the like, the user can easily carry it. In addition, the book marker has an appearance suitable for a portable device.

20 Although the present invention has been shown and described with respect to a best mode embodiment thereof, it should be understood by those skilled in the art that the foregoing and various other changes, omissions, and additions in the form and detail thereof

may be made therein without departing from the spirit
and scope of the present invention.

What is claimed is:

1. A searching system for searching contents that were broadcast, the searching system having an inputting unit, a searching unit, and a terminal unit,

wherein the inputting unit comprises:

first storing means for storing information representing at least time at which contents were broadcast corresponding to a predetermined operation; and

first communicating means for transmitting the information representing time stored in said storing means to an external unit,

wherein the searching unit comprises:

second storing means for correlatively storing information representing contents and broadcast time thereof; and

searching means for searching information representing the contents stored in said second storing means corresponding to the information representing time, and

wherein the terminal unit comprises:

second communicating means for receiving the information representing time transmitted from the inputting unit through said first communicating means;

third communicating means for transmitting the information representing time received by said second communicating means and receiving search results

transmitted from the searching unit; and

first displaying means for displaying the
information representing time received by said second
communicating means and the search results by the
5 searching unit.

2. The searching system as set forth in
claim 1,

wherein the information representing the
contents includes information about the contents.

10 3. The searching system as set forth in
claim 1,

wherein the searching unit transmits the
information representing the contents (referred to as
first contents) that were broadcast at the time
15 represented by the information representing time and
information representing contents (referred to as
second contents) that were broadcast earlier than those
and as the search results to the terminal unit
corresponding to the information representing time, the
20 amount of second contents being a multiple of the
amount of the first contents.

4. The searching system as set forth in
claim 1,

25 wherein when a predetermined operation is
performed with the terminal unit corresponding to the
search results obtained by said searching means and
displayed on said first displaying means, the terminal

unit is accessed to a site at which the contents as the search results is purchasable.

5. The searching system as set forth in claim 1,

5 wherein when the information representing time is received by said second communicating means, the transmission of the information representing time from the inputting unit to the terminal unit is virtually displayed.

10 6. The searching system as set forth in claim 5,

15 wherein the inputting unit further comprises: second displaying means for displaying entries of information representing time stored in said first storing means, and

20 wherein when the information representing time is received by said second communicating means, the virtual display of said first displaying means of the terminal unit is correlated with the display of the entries of the information representing time displayed on said second displaying means of the inputting unit.

7. The searching system as set forth in claim 6,

25 wherein when the number of entries of the information representing time displayed on said second displaying means decreases, the number of entries of the information representing time displayed on said

first displaying means increases.

8. The searching system as set forth in
claim 1,

wherein the terminal unit is an information
terminal unit that is installed as a public unit.

9. The searching system as set forth in
claim 1,

wherein the terminal unit is composed of a
personal computer.

10. The searching system as set forth in
claim 1,

wherein the contents are a musical piece.

11. The searching system as set forth in
claim 10,

wherein the terminal unit further comprises:
audio reproducing means for reproducing audio
data, and

wherein when a predetermined operation is
performed with the terminal unit corresponding to the
search results searched by said searching means and
displayed on said first displaying means, audio data
corresponding to a musical piece as the search results
is requested to the searching unit and the audio data
transmitted from the searching unit is reproduced by
said audio reproducing means.

12. The searching system as set forth in
claim 1,

wherein the contents are commodity information.

13. The searching system as set forth in claim 1,

5 wherein the searching unit further comprises:
interface means for allowing information representing the contents stored in said second storing means and/or broadcast time of the contents to be changed from an external unit that has been properly filtered.

10 14. The searching system as set forth in claim 1,

wherein the inputting unit further comprises:
program storing means for storing a control
15 program that controls the inputting unit, and

wherein the control program is transmitted from the terminal unit to the inputting unit by said first communicating means and said second communicating means and stored to said program storing means.

20 15. The searching system as set forth in claim 14,

wherein the control program is transmitted from the searching unit to the terminal unit by said third communicating means and then transmitted from the
25 terminal unit to the inputting unit.

16. The searching system as set forth in claim 14,

wherein the terminal unit further comprises:
connecting means for connecting the terminal
unit to a predetermined network, and

5 wherein the control program is transmitted to
the terminal unit through the predetermined network
connected to the terminal unit and then transmitted
from the terminal unit to the inputting unit by said
connecting means.

10 17. The searching system as set forth in
claim 14,

wherein the terminal unit further comprises:
reading means for reading data recorded on a
predetermined record medium, and

15 wherein the control program is read from the
record medium by said reading means and transmitted to
said inputting unit.

18. A terminal unit for causing contents
that were broadcast to be searched, comprising:

20 first communicating means for receiving time
information representing predetermined time from an
inputting unit and transmitting the information
representing the predetermined time to an external
unit;

25 second communicating means for transmitting
the information representing the predetermined time
received from said first communicating means to a
searching unit and receiving search results from the

searching unit, the searching unit searching
information representing contents from a storing means
corresponding to the information representing the
predetermined time, the storing means correlatively
5 storing the information representing the contents and
broadcast time thereof; and

displaying means for displaying the
information representing the predetermined time
received by said first communicating means and the
search results of the searching unit.

10 19. The terminal unit as set forth in claim
18,

wherein the information representing the
contents includes information about the contents.

15 20. The terminal unit as set forth in claim
18,

wherein said displaying means displays the
information representing the contents (referred to as
first contents) that were broadcast at the time
20 represented by the information representing the
predetermined time and information representing
contents (referred to as second contents) that were
broadcast earlier than those and as the search results
corresponding to the information representing the
25 predetermined time, the amount of second contents being
a multiple of the amount of the first contents.

21. The terminal unit as set forth in claim

18,

wherein when a predetermined operation is performed with the terminal unit corresponding to the search results obtained by said searching means and displayed on said displaying means, the terminal unit is accessed to a site at which the contents as the search results is purchasable.

22. The terminal unit as set forth in claim 18,

wherein when the information representing the predetermined time is received from the inputting unit, said displaying means virtually displays the transmission of the information representing the predetermined time from the inputting unit to the terminal unit.

23. The terminal unit as set forth in claim 22,

wherein when the information representing the predetermined time is received from the inputting unit, the virtual display of said displaying means of the terminal unit is correlated with the display of the entries of the information representing the predetermined time displayed on a second displaying means that the inputting unit has.

24. The terminal unit as set forth in claim 23,

wherein when the number of entries of the

information representing the predetermined time
displayed on said second displaying means decreases,
the number of entries of the information representing
the predetermined time displayed on said first
5 displaying means increases.

25. The terminal unit as set forth in claim
18,

wherein the terminal unit is an information
terminal unit that is installed as a public unit.

10 26. The terminal unit as set forth in claim
18,

wherein the terminal unit is composed of a
personal computer.

15 27. The terminal unit as set forth in claim
18,

wherein the contents are a musical piece,
wherein the terminal unit further comprises:
audio reproducing means for reproducing audio
data, and

20 wherein when a predetermined operation is
performed with the terminal unit corresponding to the
search results searched by said searching means and
displayed on said first displaying means, audio data
corresponding to a musical piece as the search results
25 is requested to the searching unit and the audio data
transmitted from the searching unit is reproduced by
said audio reproducing means.

28. The terminal unit as set forth in claim
18,

wherein a control program for controlling the
inputting unit is transmitted to the inputting unit by
5 said first communicating means.

29. The terminal unit as set forth in claim
28,

wherein the control program is transmitted
from the searching unit to the terminal unit and then
transmitted from the terminal unit to the inputting
10 unit by said second communicating means.

30. The terminal unit as set forth in claim
28, further comprising:

connecting means for connecting the terminal
unit to a predetermined network,
15

wherein the control program is transmitted
from the predetermined network to the terminal unit and
then transmitted from the terminal unit to the
inputting unit by said connecting means.

20 31. The terminal unit as set forth in claim
28, further comprising:

reading means for reading data from a
predetermined record medium, and

wherein the control program is read from the
25 record medium by said reading means and transmitted to
the inputting unit.

32. A terminal unit for causing contents

that were broadcast to be searched, comprising:

first storing means for storing time information representing predetermined time corresponding to a predetermined operation;

5 communicating means for transmitting the information representing the predetermined time to a searching unit and receiving search results from the searching unit, the searching unit searching information representing contents from a second storing means corresponding to the information representing the predetermined time, the second storing means correlatively storing the information representing the contents and broadcast time thereof; and

10 displaying means for displaying the information representing the predetermined time stored in said first storing means and the search results of the searching unit.

15 33. The terminal unit as set forth in claim 32,

20 wherein said displaying means displays the information representing the contents (referred to as first contents) that were broadcast at the time represented by the information representing the predetermined time and information representing contents (referred to as second contents) that were
25 broadcast earlier than those and as the search results corresponding to the information representing the

predetermined time, the amount of second contents being a multiple of the amount of the first contents.

34. The terminal unit as set forth in claim 32,

5 wherein the contents are a musical piece,
 wherein the terminal unit further comprises:
 audio reproducing means for reproducing audio
data, and

10 wherein when a predetermined operation is
performed with the terminal unit corresponding to the
search results searched by said searching means and
displayed on said first displaying means, audio data
corresponding to a musical piece as the search results
15 is requested to the searching unit and the audio data
transmitted from the searching unit is reproduced by
said audio reproducing means.

35. A searching unit for searching contents
that were broadcast, comprising:

20 a database for correlatively storing
information representing contents and broadcast time
thereof; and

25 a communication interface for receiving time
information representing predetermined time and
identification information of contents from an external
unit,

 wherein the information representing the
contents is searched corresponding to the received time

information representing the predetermined time and the received identification information of the contents.

36. The searching unit as set forth in claim 35,

5 wherein the search results are transmitted to the external unit through said communication interface.

37. A searching method for searching contents that were broadcast, comprising the steps of:

10 (a) storing information representing at least time at which contents were broadcast corresponding to a predetermined operation of an inputting unit to a first storing means;

15 (b) transmitting the information representing time stored in the first storing means to an external unit;

(c) causing a searching unit to search information representing contents stored in a second storing means corresponding to the information representing time;

20 (d) receiving the information representing time transmitted from the inputting unit at the first communicating step (b);

25 (e) transmitting the information representing time received at the second communicating step (d) and receiving search results transmitted from the searching unit;

(f) displaying the information representing

time received at the second communicating step (d); and

(g) displaying the search results of the searching unit.

38. A searching method for searching contents that were broadcast, comprising the steps of:

(a) receiving timing information representing predetermined time and identification information of contents from an external unit;

(b) searching the information representing the contents from a database corresponding to the received time information representing time and the received identification information of the contents, the database correlatively storing the information representing the contents and broadcast time thereof; and

(c) transmitting search results searched at the searching step (b) to the external unit.

39. A displaying method for causing a terminal unit to display search results of contents that were broadcast, comprising the steps of:

(a) receiving time information representing predetermined time from an inputting unit;

(b) transmitting the information representing the predetermined time to an external unit;

(c) transmitting the information representing the predetermined time received at the first communicating step (a) to a searching unit, the

searching unit searching information representing
contents from a database corresponding to the
information representing the predetermined time, the
database correlatively storing the information
5 representing the contents and broadcast time thereof;

(d) receiving search results from the
searching unit; and

(e) displaying the information representing
the predetermined time received at the first
10 communicating step (a) and the search results received
at the fourth communicating step (d).

40. A displaying method for causing a
terminal unit to display search results of contents
that were broadcast, comprising the steps of:

15 (a) storing time information representing
predetermined time corresponding to a predetermined
operation;

(b) transmitting the information representing
the predetermined time stored at the storing step (a)
20 to a searching unit, the searching unit searching
information representing contents from a database
corresponding to the information representing the
predetermined time, the database correlatively storing
the information representing the contents and broadcast
25 time thereof;

(c) receiving search results from the
searching unit; and

(d) displaying the information representing the predetermined time stored at the storing step (a) and the search results of the contents received at the second communication step (c).

5 41. A record medium for recording a control program that causes search results of contents to be displayed on a terminal unit, the control program causing the terminal unit to perform the steps of:

10 (a) receiving time information representing predetermined time from an inputting unit;

 (b) transmitting the information representing the predetermined time to an external unit;

15 (c) transmitting the information representing the predetermined time to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing the predetermined time, the database correlatively storing the information representing the contents and broadcast time thereof;

20 (d) receiving search results from the searching unit; and

 (e) displaying at least the received search results.

25 42. A record medium for recording a control program that causes search results of contents to be displayed on a terminal unit, the control program causing the terminal unit to perform the steps of:

(a) storing time information representing predetermined time corresponding to a predetermined operation;

5 (b) transmitting the information representing the predetermined time stored at the storing step (a) to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing the predetermined time, the database correlatively storing the information representing the contents and broadcast
10 time thereof;

(c) receiving search results from the searching unit; and

(d) displaying at least the search results on
15 the terminal unit.

43. A record medium for recording a control program that causes an inputting unit to input information representing time to a researching unit, the control program causing the inputting unit to
20 perform the steps of:

(a) storing time information representing predetermined time corresponding to user's operation;

(b) transmitting the time information representing the predetermined time stored at the
25 storing step (a) to an external unit; and

(c) inputting the time information representing the predetermined time to a searching

unit, the searching unit searching information
representing contents from a database corresponding to
the time information representing the predetermined
time at which contents were broadcast, the database
correlatively storing the information representing the
contents and broadcast time thereof.

44. The record medium as set forth in claim
43,

wherein the control program causing the
inputting unit to further perform the step of:

(d) displaying the number of entries of the
time information representing the predetermined time
stored at the storing step (a).

45. A record medium for recording a control
program that causes an inputting unit having a counter
that operates with a predetermined clock signal and
that inputs information representing time to a
searching unit, the control program causing the
inputting unit to perform the steps of:

(a) storing a count value of the counter at
predetermined time corresponding to user's operation;

(b) transmitting the count value stored at
the storing step (a) to an external unit; and

(c) inputting the information representing
time to the searching unit, the searching unit
searching information representing contents from a
database corresponding to the information representing

time at which contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

5 46. The record medium as set forth in claim 45, the control program causing the inputting unit to further perform the step of:

(d) displaying the number of entries of the time information representing the predetermined time stored at the storing step (a).

10 47. An inputting unit for inputting information representing time, comprising:

a counter that operates with a predetermined clock signal;

15 storing means for storing a count value of said counter at predetermined time corresponding to user's operation;

a connecting portion for directly connecting the count value stored in said storing means to an external unit; and

20 communicating means for transmitting the count value stored in said storing means to the external unit through said connecting portion,

25 wherein the information representing time is input to a searching unit through the external unit, the searching unit searching information representing contents from a database corresponding to the information representing time at which contents were

broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

5 48. The inputting unit as set forth in claim 47,

wherein the information representing the contents includes information about contents.

49. The inputting unit as set forth in claim 47,

10 wherein the predetermined time is time at which the user knows his or her desired contents.

50. The inputting unit as set forth in claim 47, further comprising:

junction means having:

15 a base having an attaching portion for attaching said connecting portion, the attaching portion being disposed on an upper surface of said base; and

20 connecting means, protruding from the attaching portion, for connecting the external unit, wherein said communicating means transmits the count value through said junction means.

51. The inputting unit as set forth in claim 50, wherein said junction means has a lid 25 integrally formed with a main body of the inputting unit.

52. The inputting unit as set forth in claim

47, wherein the external unit is an information terminal unit that is installed as a public unit.

53. An inputting unit for inputting information representing time, comprising:

5 a counter that operates with a predetermined clock signal;

storing means for storing a count value of said counter at predetermined time corresponding to user's operation;

10 displaying means for displaying the count value stored in said storing means; and

communicating means for transmitting the count value stored in said storing means to an external unit,

15 wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing time at which the contents were broadcast, the database correlatively storing the information representing the
20 contents and broadcast time thereof.

54. The inputting unit as set forth in claim 53,

25 wherein the count value is represented with spherical members on one side of said displaying means.

55. The inputting unit as set forth in claim 54,

wherein when the count value is transmitted by said communicating means, the number of spherical members gradually decreases on one side of said displaying means, and

5 wherein when part of the spherical members disappears, the other spherical members move to the positions at which the spherical members disappear.

56. The inputting unit as set forth in claim 53,

10 wherein said displaying means is formed in an almost square shape, and

 wherein members representing the count value are arranged in a lattice shape irrespective of the storing order of entries of the information
15 representing time stored in said storing means.

57. The inputting unit as set forth in claim 53,

 wherein the count value is represented with rod shaped members.

20 58. The inputting unit as set forth in claim 53,

 wherein the count value is represented as the size of an area of said displaying means.

59. The inputting unit as set forth in claim
25 53,

 wherein the predetermined time is time at which the user knows his or her desired broadcast

contents.

60. The inputting unit as set forth in claim
53,

5 wherein said communicating means transmits
the count value to an information terminal unit that is
installed as a public unit.

61. The inputting unit as set forth in claim
53,

10 wherein the information representing the
contents includes information about the contents.

62. An inputting unit for inputting
information representing time, comprising:

a counter that operates with a predetermined
clock signal;

15 storing means for storing a count value of
said counter at predetermined time corresponding to
user's operation;

20 communicating means for transmitting the
count value stored in said storing means to an external
unit; and

sound generating means for generating a sound
corresponding to the count value stored in said storing
means,

25 wherein information representing time is
input to a searching unit, the searching unit searching
information representing contents from a database
corresponding to the information representing time at

which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

5 63. The inputting unit as set forth in claim 62,

 wherein said sound generating means generates a sound corresponding to the predetermined operation when the count value stored in said storing means exceeds a predetermined value.

10 64. The inputting unit as set forth in claim 62,

 wherein said sound generating means generates a sound when the count value stored in said storing means exceeds a predetermined value and the predetermined operation is performed.

15 65. The inputting unit as set forth in claim 62,

 wherein the predetermined time is time at which the user knows his or her desired broadcast contents.

20 66. The inputting unit as set forth in claim 62,

 wherein said communicating means transmits the count value to an information terminal unit that is installed as a public unit.

25 67. The inputting unit as set forth in claim 62,

wherein the information representing the contents includes information about the contents.

68. An inputting unit for inputting information representing time, comprising:

5 a counter that operates with a predetermined clock signal;

 first storing means for storing a count value of said counter at predetermined time corresponding to user's operation;

10 identification information generating means for generating predetermined identification information corresponding to the user's operation;

 second storing means for storing the identification information generated by said
15 identification information generating means; and

 communicating means for transmitting the count value and the identification information stored in said first storing means and said second storing means to an external unit,

20 wherein information representing time and identification information identifying contents are input to a searching unit, the searching unit searching information representing contents from a database corresponding to the information representing time at
25 which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

69. The inputting unit as set forth in claim
68,

wherein said first storing means and said
second storing means store the count value and the
5 identification information to a common memory disposed
in the inputting unit.

70. The inputting unit as set forth in claim
68,

wherein said first storing means and said
second storing means store the count value and the
10 identification information to discrete memories
disposed in the inputting unit.

71. The inputting unit as set forth in claim
68, further comprising:

15 pressing means composed of at least one
button,

wherein said identification information
generating means detects the pressing manner of the
user against the button and generates the
20 identification information that varies corresponding to
the pressing manner.

72. The inputting unit as set forth in claim
68, further comprising:

displaying means for displaying the count
25 value stored in said first storing means,

wherein said displaying means displays the
count value in a different manner that varies

corresponding to the identification information.

73. The inputting unit as set forth in claim
68,

5 wherein the predetermined time is time at
which the user knows his or her desired broadcast
contents.

74. The inputting unit as set forth in claim
68,

10 wherein said communicating means transmits
the count value to an information terminal unit that is
installed as a public unit.

75. The inputting unit as set forth in claim
68,

15 wherein the identification information
identifying the contents is information that identifies
whether the contents are television broadcast contents
or radio broadcast contents.

76. The inputting unit as set forth in claim
68,

20 wherein the identification information
identifying the contents is information that identifies
whether the contents were broadcast in a predetermined
area or out of the predetermined area.

77. The inputting unit as set forth in claim
25 68,

wherein the information representing the
contents includes information about the contents.

78. An inputting unit for inputting
information representing time, comprising:

a counter that operates with a predetermined
clock signal;

5 first storing means for storing a count value
of said counter at predetermined time corresponding to
user's operation;

communicating means for communicating with an
external unit and transmitting the count value stored
in said first storing means to an external unit; and

10 second storing means for storing data
transmitted from an external unit through said
communicating means,

wherein information representing time is
15 input to a searching unit, the searching unit searching
information representing contents from a database
corresponding to the information representing time at
which the contents were broadcast, the database
correlatively storing the information representing the
20 contents and broadcast time thereof.

79. The inputting unit as set forth in claim
78,

wherein the information representing the
contents includes information about the contents.

25 80. The inputting unit as set forth in claim
78,

wherein the data stored in said second

storing means is the contents or information
thereabout.

81. The inputting unit as set forth in claim
78,

5 wherein the data stored in said second
storing means is compression-encoded audio data, and
 wherein the inputting unit further comprises:
 audio data reproducing means for decoding the
compression-encoded audio data and reproducing the
10 decoded audio data.

82. The inputting unit as set forth in claim
78,

 wherein the data is encrypted data
corresponding to a predetermined encrypting method, and
 wherein the inputting unit further comprises:
15 decrypting means for decrypting the encrypted
data.

83. The inputting unit as set forth in claim
78,

20 wherein said first storing means and said
second storing means store the count value and the data
to a common memory disposed in the inputting unit.

84. The inputting unit as set forth in claim
78,

25 wherein said first storing means and said
second storing means store the count value and the data
to discrete memories disposed in the inputting unit.

85. The inputting unit as set forth in claim
78,

wherein the predetermined time is time at
which the user knows his or her desired broadcast
contents.

86. The inputting unit as set forth in claim
78,

wherein said communicating means transmits
the count value to an information terminal unit that is
installed as a public unit.

87. An inputting unit for inputting
information representing time, comprising:

storing means for storing time information
representing predetermined time corresponding to user's
operation;

displaying means for displaying the number of
entries of the time information stored in said storing
means; and

communicating means for transmitting the time
information stored in said storing means to an external
unit,

wherein information representing time is
input to a searching unit, the searching unit searching
information representing contents from a database
corresponding to the time information representing time
at which the contents were broadcast, the database
correlatively storing the information representing the

contents and broadcast time thereof.

88. The inputting unit as set forth in claim
87,

5 wherein the predetermined time is time at
which the user knows his or her desired broadcast
contents.

89. The inputting unit as set forth in claim
87,

10 wherein said communicating means transmits
the count value to an information terminal unit that is
installed as a public unit.

90. The inputting unit as set forth in claim
87,

15 wherein the information representing the
contents includes information about the contents.

91. An inputting unit for inputting
information representing time, comprising:

20 first storing means for storing time
information representing predetermined time
corresponding to user's operation;

communicating means for communicating with an
external unit and transmitting the time information
stored in said first storing means to the external
unit; and

25 second storing means for storing data
transmitted from the external unit through said
communicating means,

wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to the time information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

92. The inputting unit as set forth in claim 91,

wherein the data stored in said second storing means is the contents or information thereabout.

93. The inputting unit as set forth in claim 91,

wherein the information representing the contents includes information about the contents.

94. An inputting unit for inputting information representing time, comprising:

a counter that operates with a predetermined clock signal;

storing means for storing a count value of said counter at predetermined time corresponding to user's operation;

sound generating means for generating a predetermined sound when the count value is stored to said storing means corresponding to the user's operation; and

communicating means for transmitting the
count value stored in said storing means to an external
unit,

5 wherein information representing time is
input to a searching unit, the searching unit searching
information representing contents from a database
corresponding to the information representing time at
which the contents were broadcast, the database
correlatively storing the information representing the
10 contents and broadcast time thereof.

95. The inputting unit as set forth in claim
94,

wherein the information representing the
contents includes information about the contents.

15 96. An inputting method for an inputting
unit having a counter that operates with a
predetermined clock signal, the method comprising the
steps of:

20 (a) storing a count value of the counter at
predetermined time corresponding to user's operation;

(b) directly connecting the count value
stored at the storing step (a) to an external unit; and

25 (c) transmitting the count value stored at
the storing step (a) to the external unit connected at
the connecting step (b),

wherein information representing time is
input to a searching unit through the external unit,

the searching unit searching information representing contents from a database corresponding to time information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

97. The inputting method as set forth in claim 96,

wherein the information representing the contents includes information about the contents.

98. An inputting method for an inputting unit having a counter that operates with a predetermined clock signal, the method comprising the steps of:

- (a) storing a count value of the counter at predetermined time corresponding to user's operation;
- (b) displaying the count value stored at the storing step (a); and
- (c) communicating the count value stored at the storing step (a) to an external unit,

wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to time information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

99. The inputting method as set forth in claim 98,

wherein the information representing the contents includes information about the contents.

5 100. An inputting method for an inputting unit having a counter that operates with a predetermined clock signal, the method comprising the steps of:

10 (a) storing a count value of the counter at predetermined time corresponding to user's operation;

(b) transmitting the count value stored at the storing step (a) to an external unit; and

(c) generating a sound corresponding to the count value stored at the storing step (a),

15 wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to time information representing time at which the contents were broadcast, the database correlatively storing the information representing the
20 contents and broadcast time thereof.

101. The inputting method as set forth in claim 100,

25 wherein the information representing the contents includes information about the contents.

102. An inputting method for an inputting unit having a counter that operates with a

predetermined clock signal, the method comprising the steps of:

(a) storing a count value of the counter at predetermined time corresponding to user's operation;

5 (b) generating predetermined identification information corresponding to the user's operation;

(c) storing the identification information generated at the identification information generating step (b);

10 (d) transmitting the count value and the identification information stored at the first storing step (a) and the second storing step (c) to an external unit,

15 wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to time information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

20 103. The inputting method as set forth in claim 102,

wherein the information representing the contents includes information about the contents.

25 104. An inputting method for an inputting unit having a counter that operates with a predetermined clock signal, the method comprising the

steps of:

(a) storing a count value of the counter at predetermined time corresponding to user's operation;

(b) communicating with an external unit and transmitting the count value stored at the first storing step (a) to the external unit; and

(c) storing the data transmitted from the external unit at the communicating step (b),

wherein information representing time is input to a searching unit, the searching unit searching information representing contents from a database corresponding to time information representing time at which the contents were broadcast, the database correlatively storing the information representing the contents and broadcast time thereof.

105. The inputting method as set forth in claim 104,

wherein the information representing the contents includes information about the contents.

ABSTRACT OF THE DISCLOSURE

A searching system for searching contents that were broadcast, the searching system having an inputting unit, a searching unit, and a terminal unit is disclosed, wherein the inputting unit comprises a first storing means for storing information representing at least time at which contents were broadcast corresponding to a predetermined operation, and a first communicating means for transmitting the information representing time stored in the storing means to an external unit, wherein the searching unit comprises a second storing means for correlatively storing information representing contents and broadcast time thereof, and a searching means for searching information representing the contents stored in the second storing means corresponding to the information representing time, and wherein the terminal unit comprises a second communicating means for receiving the information representing time transmitted from the inputting unit through the first communicating means, a third communicating means for transmitting the information representing time received by the second communicating means and receiving search results transmitted from the searching unit, and a first displaying means for displaying the information representing time received by the second communicating means and the search results by the searching unit.

Fig. 1

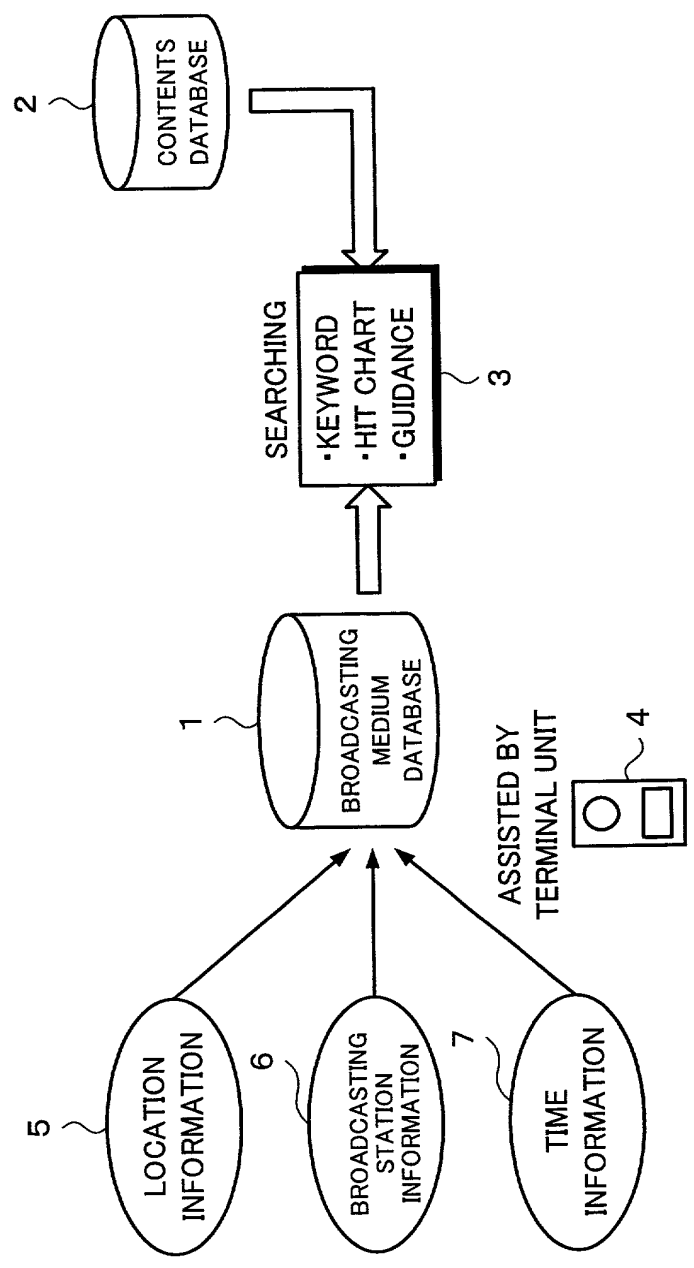


Fig. 2

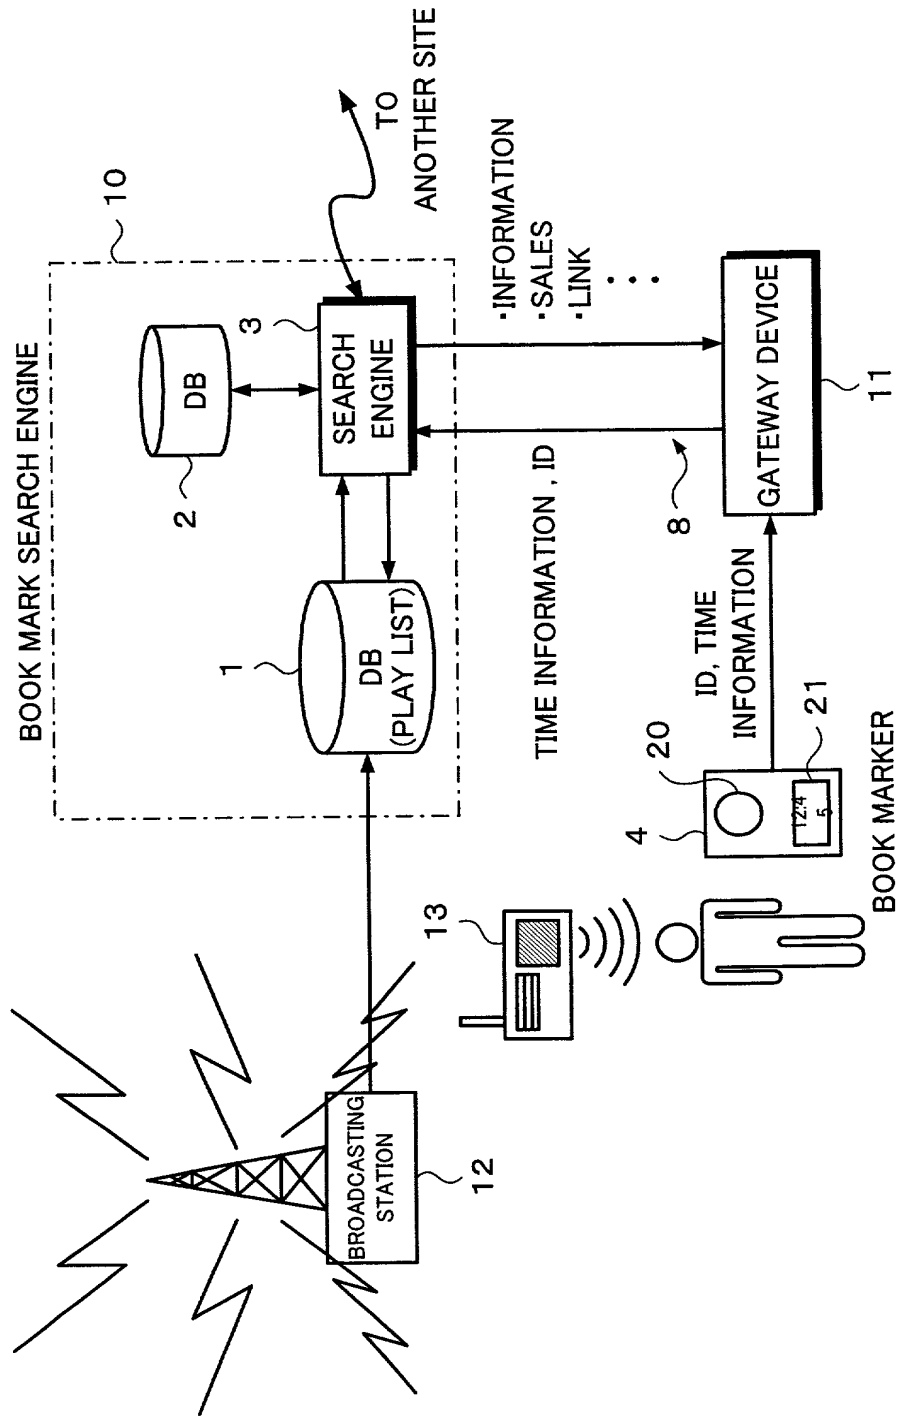


Fig. 3

Station name	95. 5XYZA
Area	New York
Start time	12:44:50
End time	12:49:15
Content	x x x x x x x x

Fig. 4

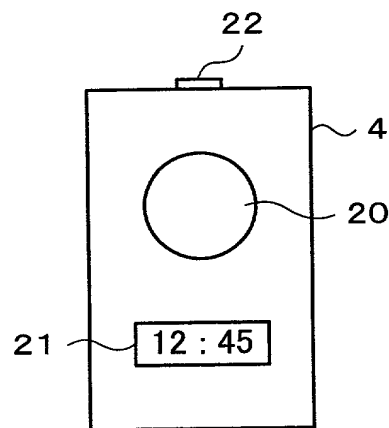


Fig. 5

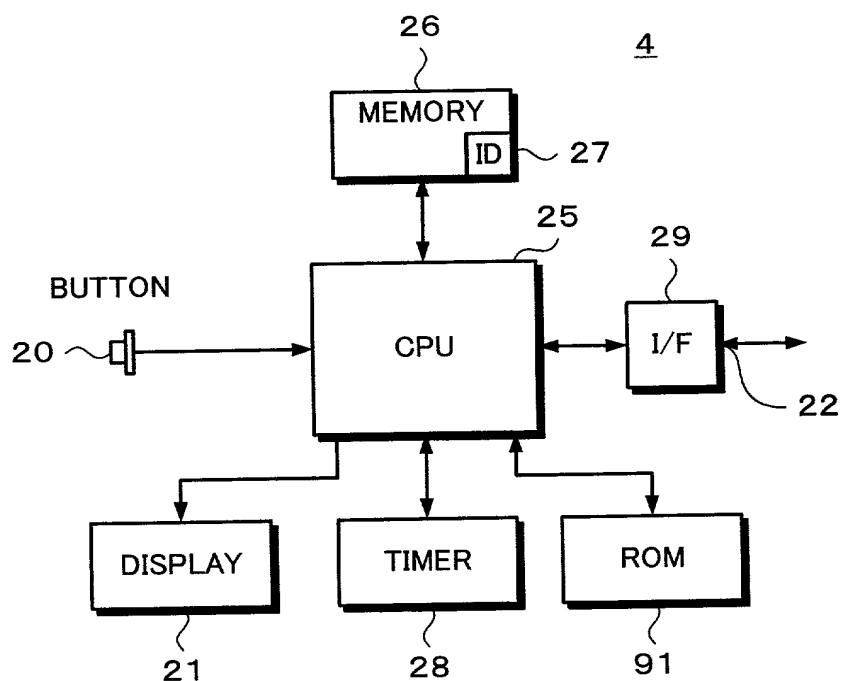


Fig. 6

TERMINAL ID : XXXX-YYYY-ZZZZ		
BOOK MARK 1	1/11/98	12:45
BOOK MARK 1	(blank)	
BOOK MARK 1	(blank)	
BOOK MARK 1	(blank)	
⋮	⋮	

Fig. 7

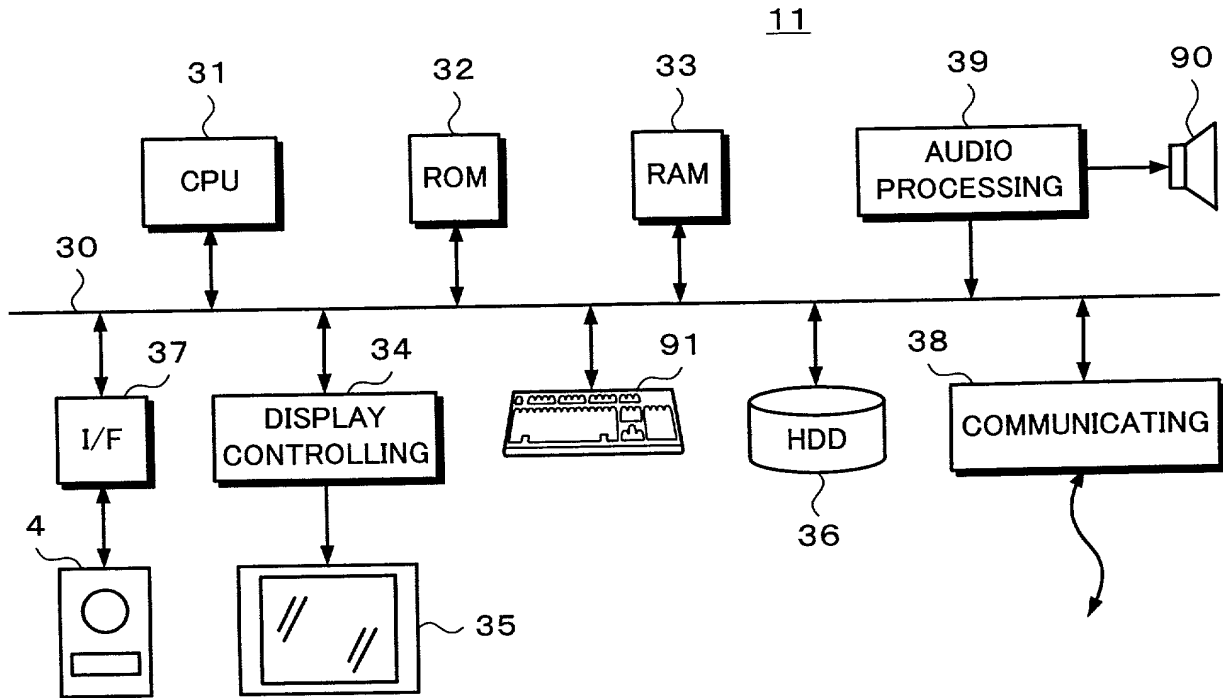


Fig. 8

Diagram illustrating a form layout (Fig. 8) for data entry. The form includes the following fields:

NAME	xxx xx	41
BOOK MARK ID	1234-5678	42
ZIP CODE	xxx - xxx xx	43
AREA CODE	xxxx	44
RADIO STATION	XYZA BCDE	45
CARD NUMBER	012-3456-7890	46
ADDRESS	XXX CITY XXX COUNTRY	47

Fig. 9

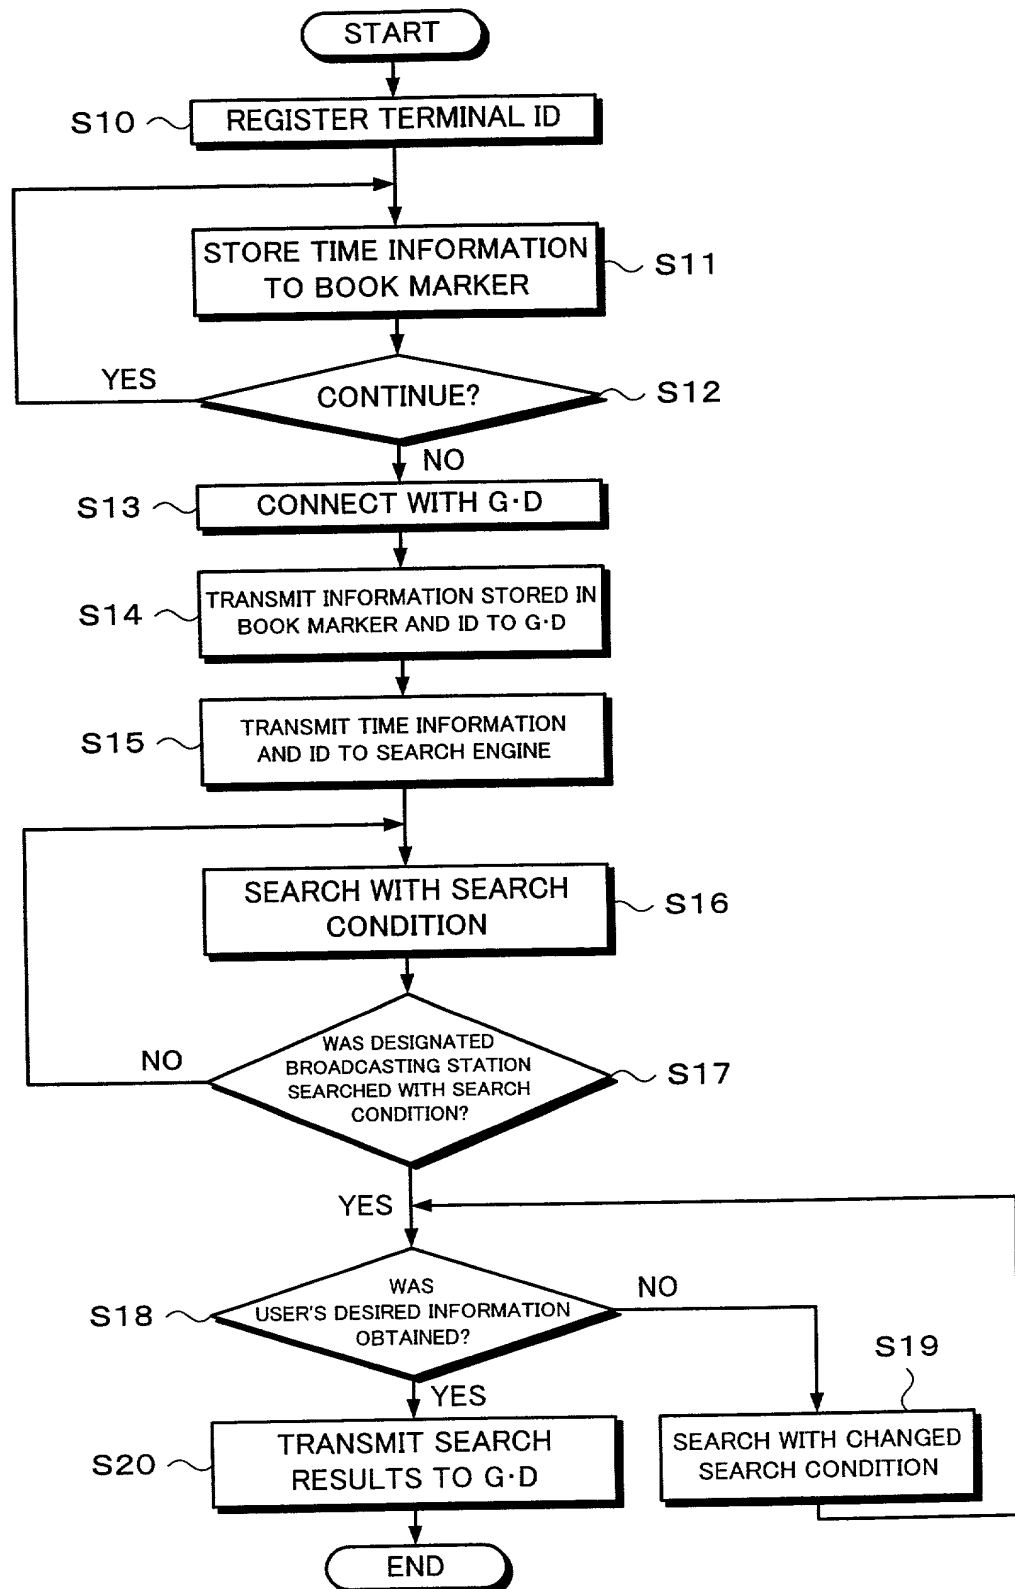


Fig. 10

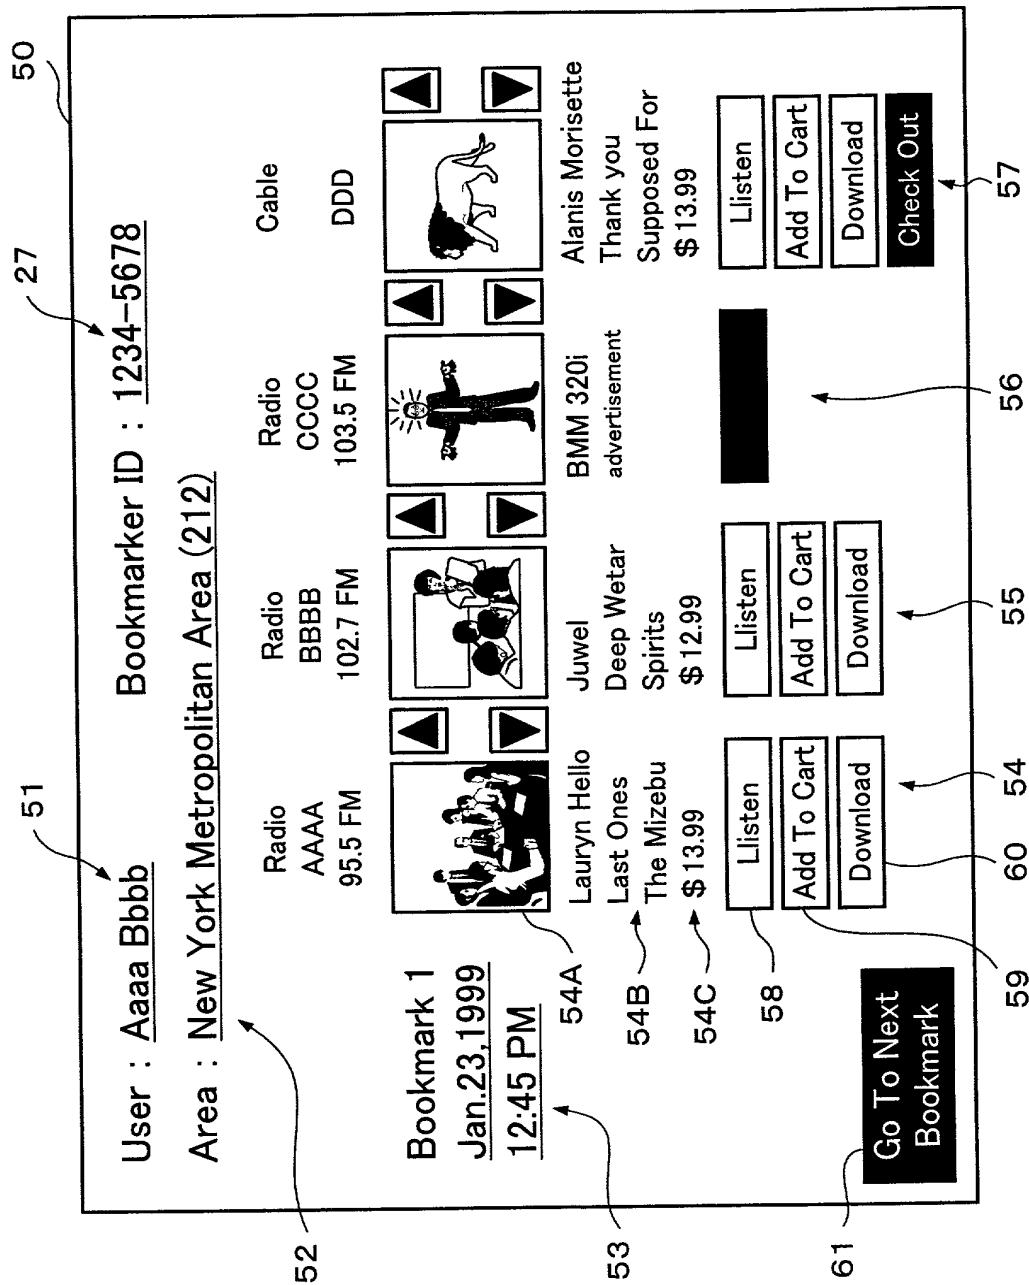


Fig. 11A

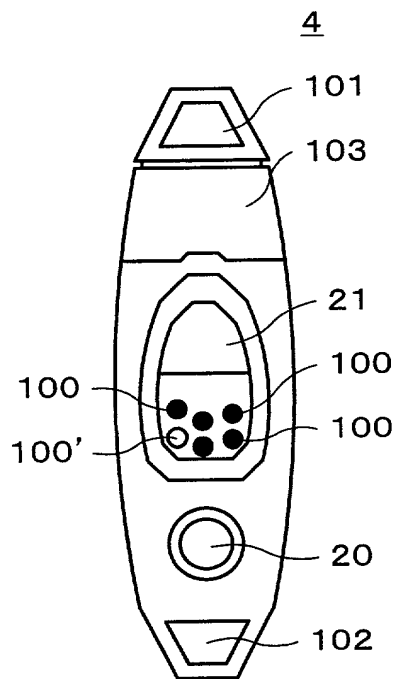


Fig. 11B

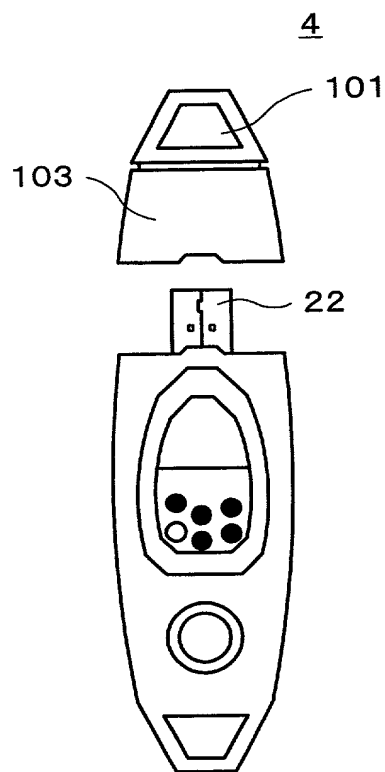


Fig. 12

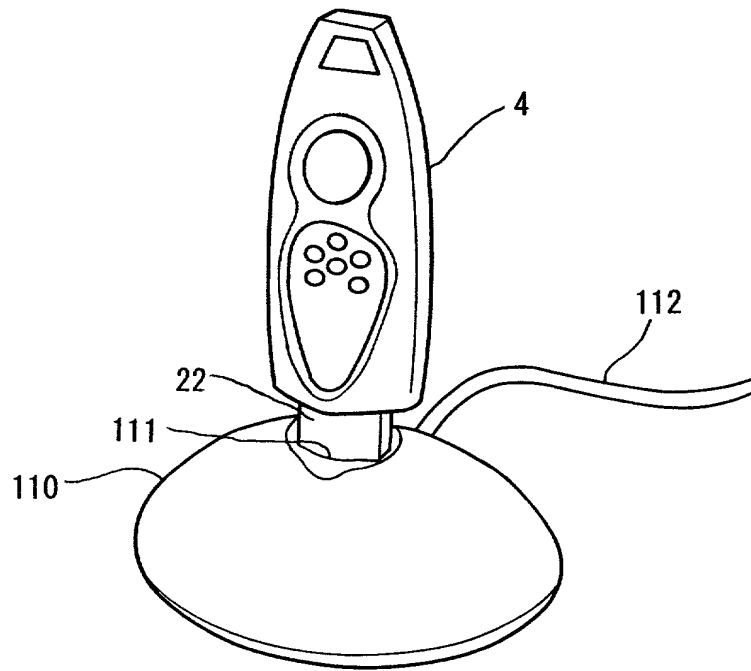


Fig. 13A




Fig. 13B




Fig. 13C




Fig. 14A

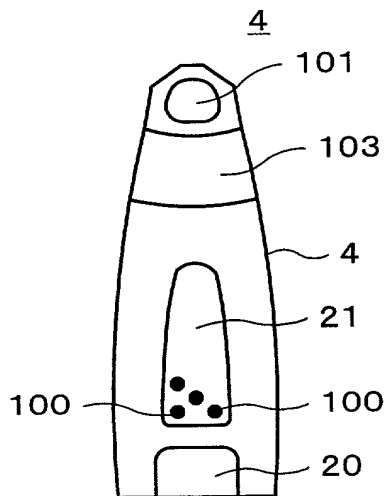


Fig. 14B

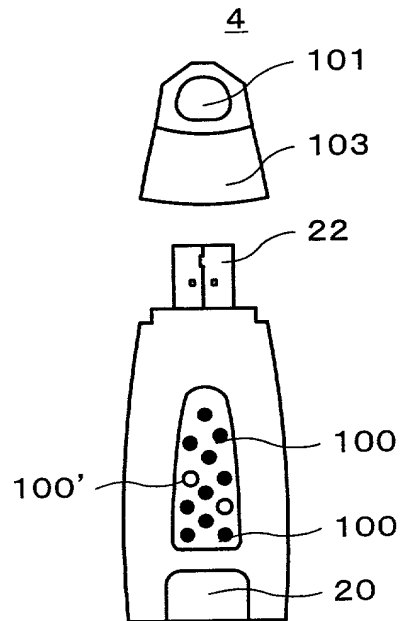


Fig. 15A

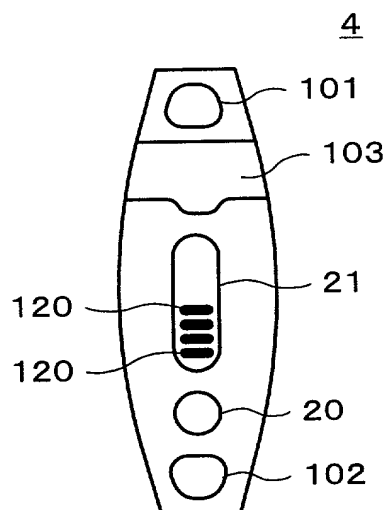


Fig. 15B

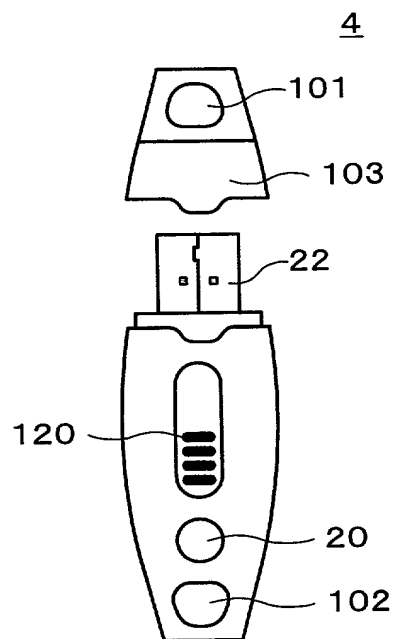


Fig. 16A

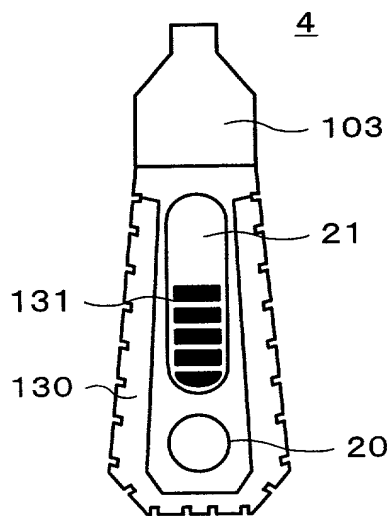


Fig. 16B

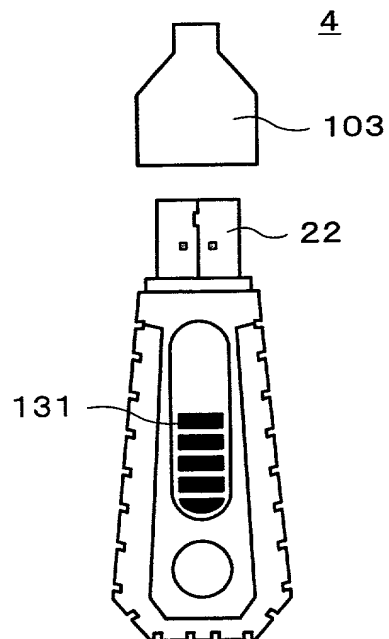


Fig. 17

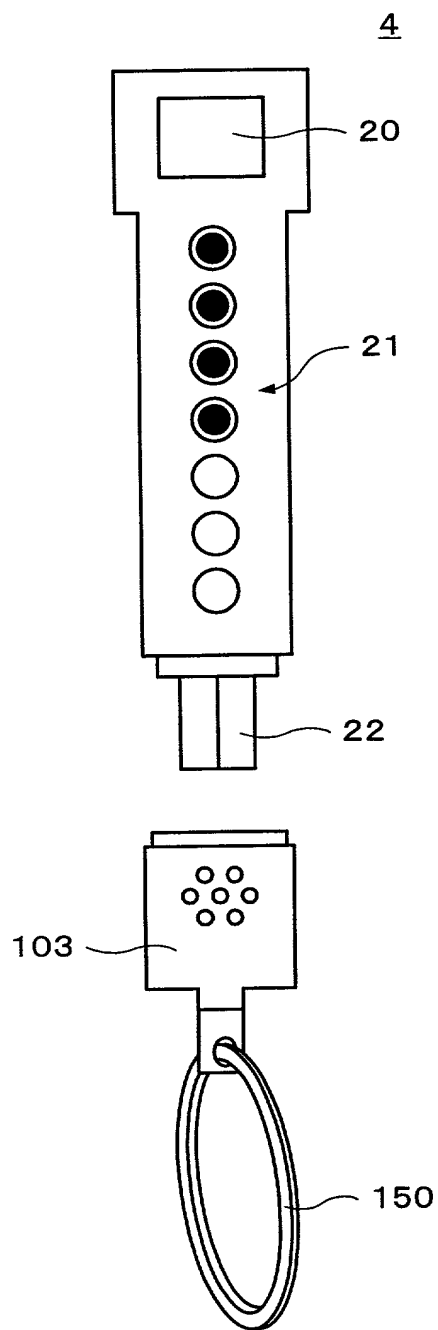


Fig. 18

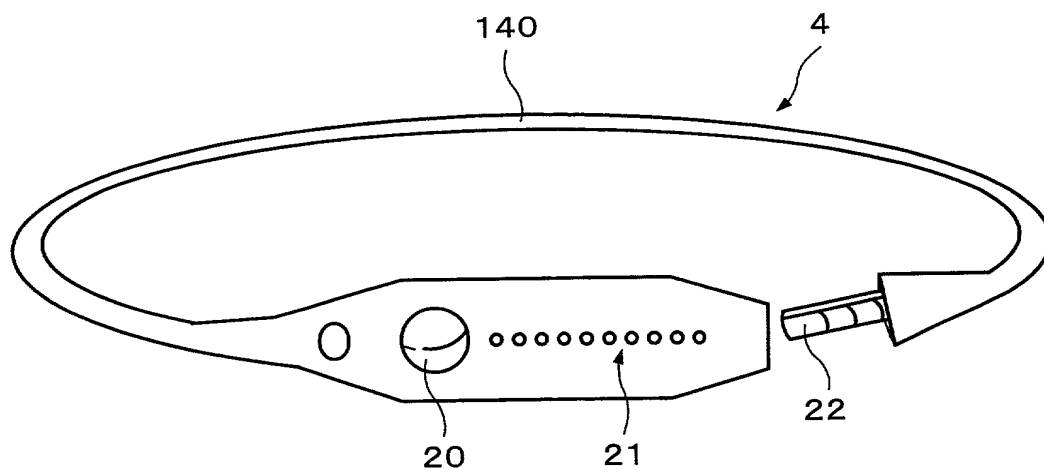


Fig. 19

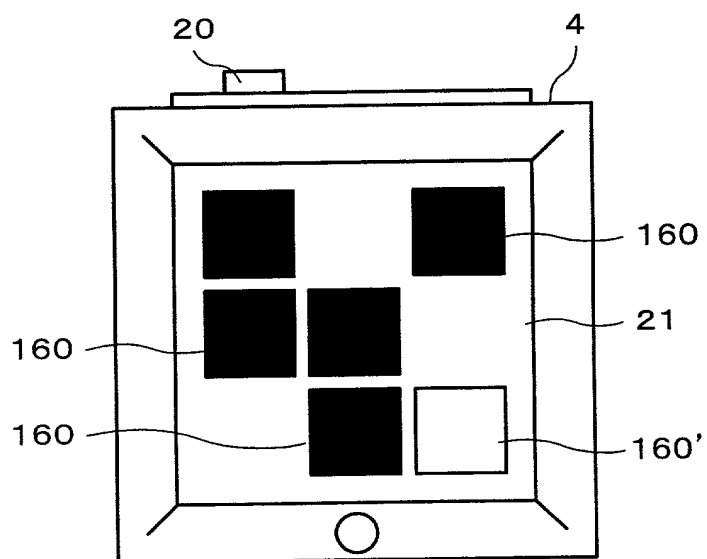


Fig. 20

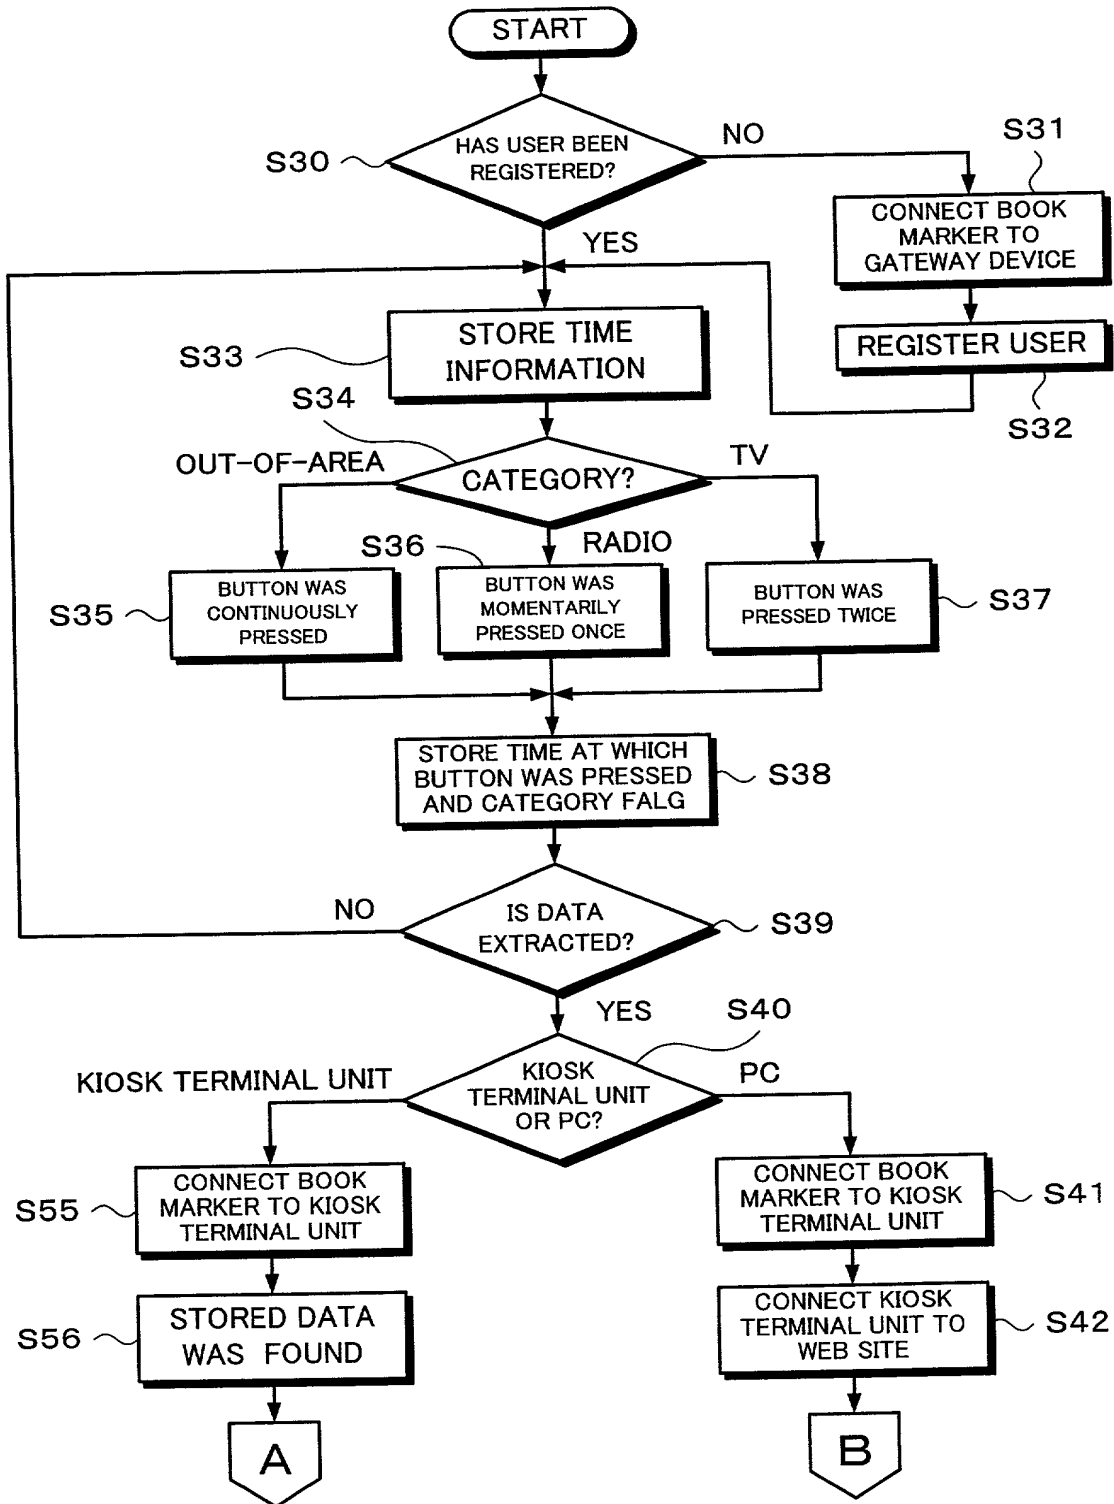


Fig. 21

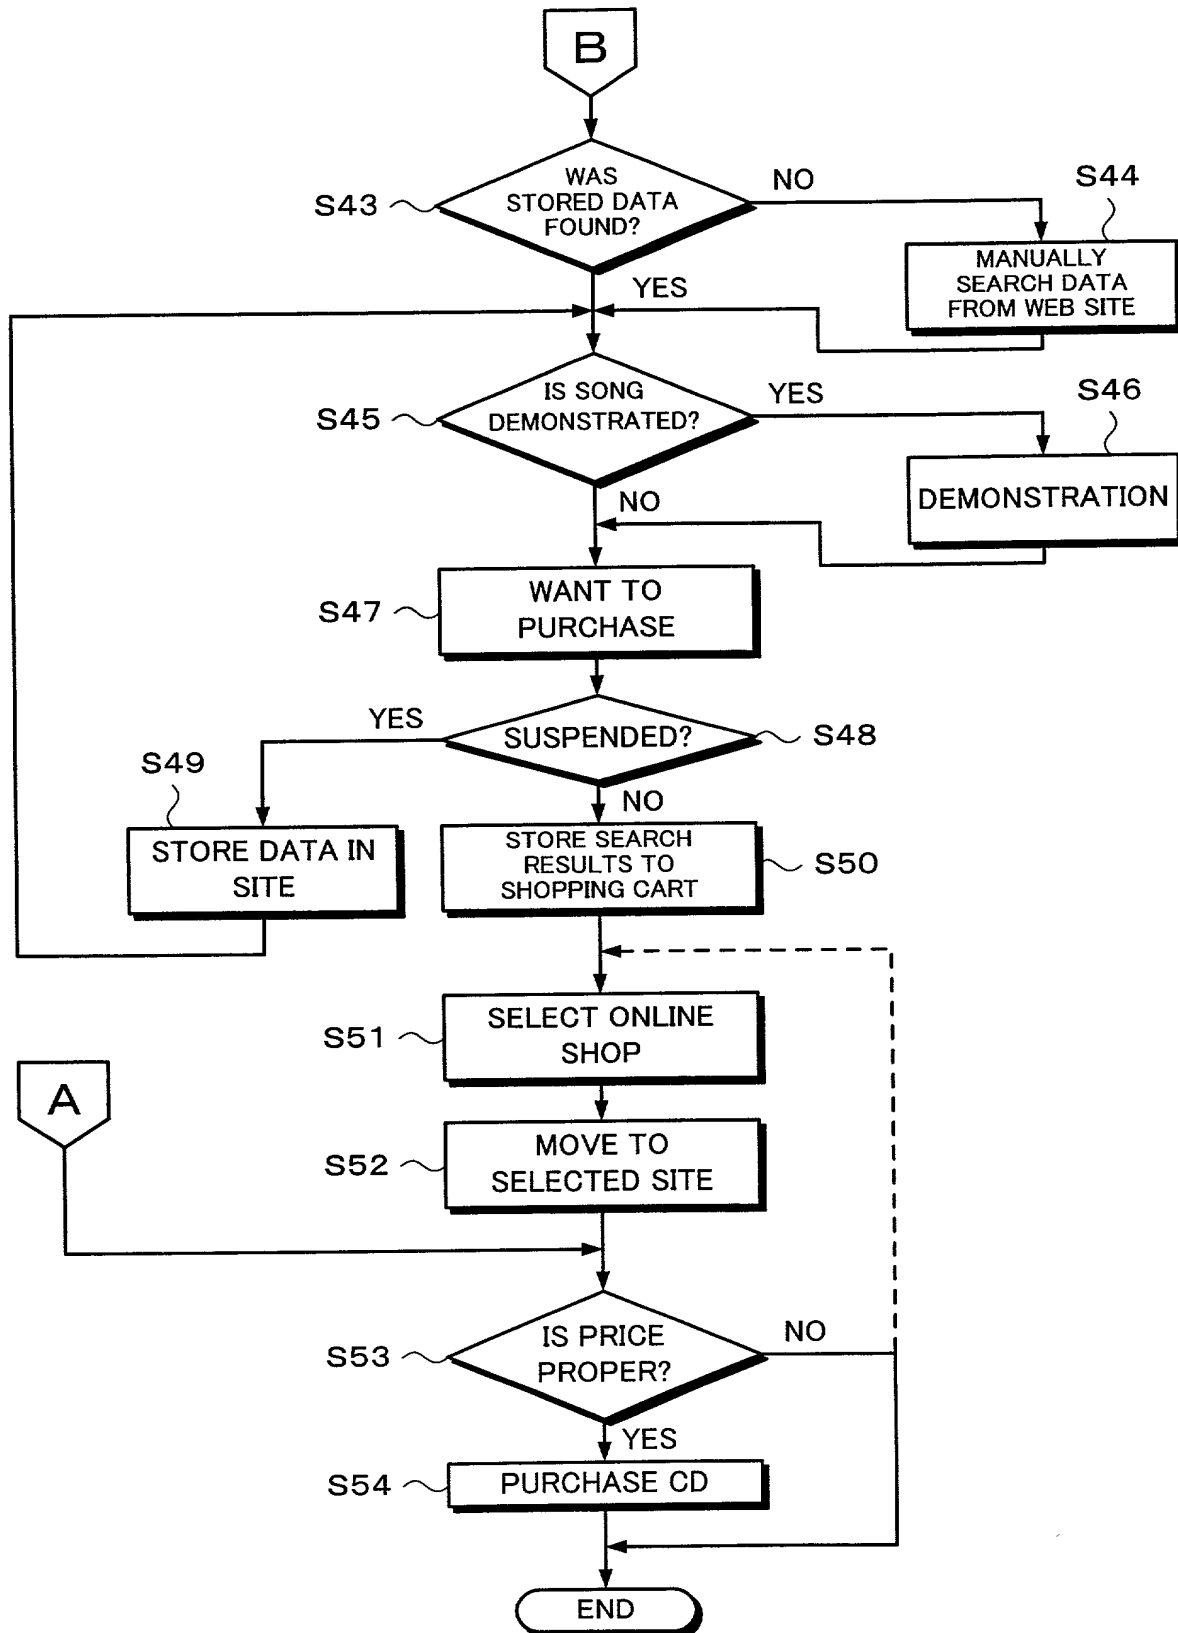


Fig. 22

<div style="display: flex; justify-content: space-between;"> FILE (F) EDIT (E) VIEW (V) FAVORITE (A) TOOL (T) HELP (H) <input type="button" value="X"/> <input type="button" value="E"/> <input type="button" value="F"/> </div>		
ADDRESS (D) <input type="text" value="http://www....."/>	<div style="display: flex; justify-content: space-around;"> HOME ABOUT FAQS YOUR PROFILE </div>	Your musical Connection

Please select Your earmk

201	202	203	204	205	206	207	208	209
① 10/17/99 11:15PM	② 10/18/99 12:00AM	③ 10/18/99 9:24AM	④ 10/18/99 9:37AM	⑤ 10/18/99 7:35PM	⑥ 10/20/99 8:57AM	⑦ 10/20/99 9:11AM	⑧ 10/20/99 7:29PM	⑨ 10/23/99 2:03PM

B M A R K E R

CURRENT BMARKS

201	202	203	204	205	206	207	208	209

SAVED BMARKS

SHOPPING CART

Hello, John Davis

Welcome to BMARKER.

You have tracked the BMARKER(s) above.If you'd like to find out the song title and artist,please select an BMARKER.

☐ PAGE HAS BEEN DISPLAYED

Fig. 23

210
217

FILE (F) EDIT (E) VIEW (V) FAVORITE (A) TOOL (T) HELP (H)
ADDRESS (D) <http://www.>

HOME ABOUT FAQs YOUR PROFILE
» MOVE » LINK » RETURN

B MARKER

Please select Your earmk

1 10/17/99 11:15PM

2 10/18/99 12:00AM

3 10/18/99 9:24AM

4 10/18/99 9:37AM

5 10/18/99 7:35PM

6 10/20/99 8:57AM

7 10/20/99 9:11AM

8 10/20/99 7:29PM

9 10/23/99 2:03PM

201

202

203

204

205

206

207

208

209

Current BMARKER

10/18/99 12:00PM

2

CURRENT BMARKS

106.1 FM San Francisco, CA
R&B, Hip-Hop

95.5 FM San Francisco, CA
Pop/Rock

95.6 FM San Francisco, CA
Rock

BBBB

211

212

213

214

215

216

SAVED BMARKS

Missy Elliot "Supa Dupa Fly"

Madonna "Ray of Light"

Bjork "All is Full of Love"
Jamiroquai "Cosmic Girl"

211

212

213

214

215

216

SHOPPING CART

SAVE LISTEN BUY

SAVE LISTEN BUY

SAVE LISTEN BUY

SAVE LISTEN BUY

211

212

213

214

215

216

☐ PAGE HAS BEEN DISPLAYED

Fig. 24

220

FILE (F) EDIT (E) VIEW (V) FAVORITE (A) TOOL (T) ヘルプ(H)

ADDRESS (D) http://www.....

MOVE LINK RETURN

HOME ABOUT FAQs YOUR PROFILE Your musical Connection

BMARKER

Listening Booth

CURRENT BMARKS SAVED BMARKS SHOPPING CART

Artist : Madonna Song : Ray of Light

Album : Ray of Laight

Data : 1998 Label : WEA/Warner Brothers

Genre : Pop/Rock

sound clip : 15 seconds

VOL

1. Drowned World Substitute for Love

2. Swim

3. Ray of Light

4. Candy Perfume Girl

6. Nothing Really Matters

7. Sky Fits Heaven

8. Shanti/Ashtangi

9. Frozen

10. The Power of Goodbye

11. To Have And Not To Hold

12. Little Star

13. Mer Girl

222

SAVE BUY 225

☐ PAGE HAS BEEN DISPLAYED

221 223 224

230

232 233 234

Heard it, like it, want it.

You have placed the BMARKER(s) below in on your buy list. If you'd like to purchase....

Shopping Cart

CURRENT BMARKS

SHOPPING CART

Madonna	Ray of Light	Ray of Light	95.3 FM AAA	San Francisco, CA	Save for Later	Delete
Isaac Hayes	Theme from "Shaft"	Shaft	98.1 FM BBB	San Francisco, CA	Save for Later	Delete
Billy Idol	White Wedding	Vital Idol	104.5 FM EEE	San Francisco, CA	Save for Later	Delete
The Roots	You Got Me	Things Fall Apart	106.1 FM FFF	San Francisco, CA	Save for Later	Delete

choose your vendor:

 Edit vendor list

☐ PAGE HAS BEEN DISPLAYED

242B

242C

243

Fig. 26

Fig. 27

250

251

252

253

FILE (F)

EDIT (E)

VIEW (V)

FAVORITE (A)

TOOL (T)

HELP (H)

ADDRESS (D)

http://www.

MOVE

LINK

RETURN

CDSOHP C

You Music. Your Store.

Home

New & Reviews.

Sales & Specials.

Gifts

My CDSHOP C

Help

Artist

Find It

Search Classical

Visit the Gap Shop.

Win Gap Jeans and Khakis for Life!

FREE Music Downloads!

Guided By Voices.Herb Alpert. Sevendust...

Shopping Cart

All of your account information can now be found in My CDSHOP C.

Cart Contents

Ready to continue shopping? Go back to the CDSHOP C home page.

Click here for an explanation of our inventory information.

To Change item quantities or move items to your Wish List, [click here.](#)

CD	price	description	price list
1	\$13.99	Billy Idol : Vital Idol	BUY ~ 254A
1	\$13.99	In stock Shipping Ctr A	BUY ~ 254B
1	\$12.58	Isaac Hayes : Shaft	BUY ~ 254C
1	\$11.88	Madonna : Ray Of Light	BUY ~ 254D
1	\$16.97	In stock Shipping Ctr A	
1	\$16.97	Things Fall Apart	
1	\$16.97	In stock Shipping Ctr A	

PAGE HAS BEEN DISPLAYED

Fig. 28


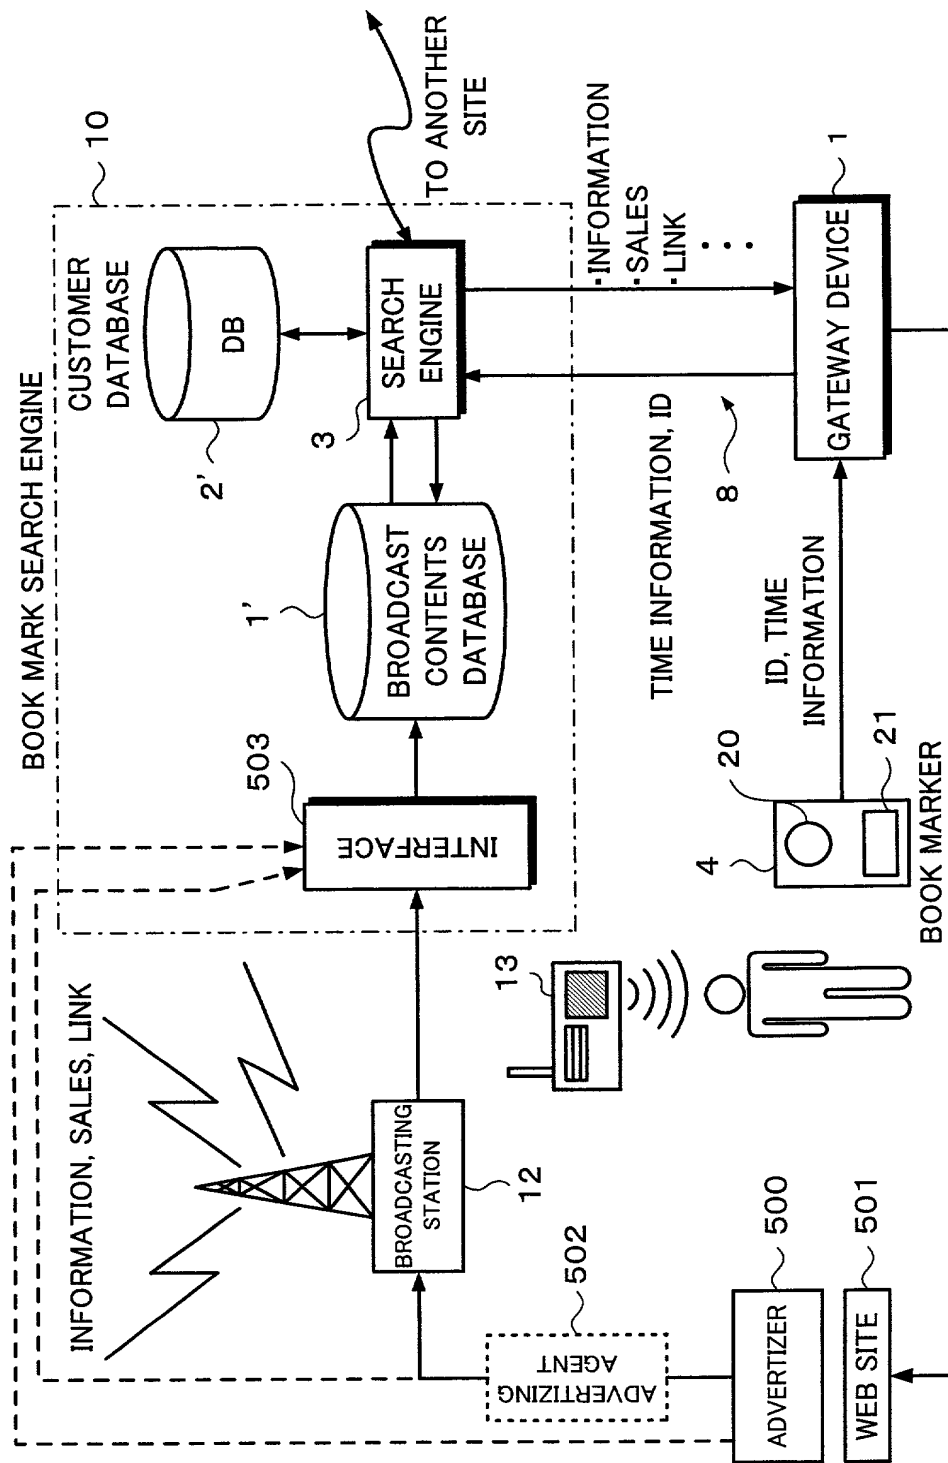


Fig. 29

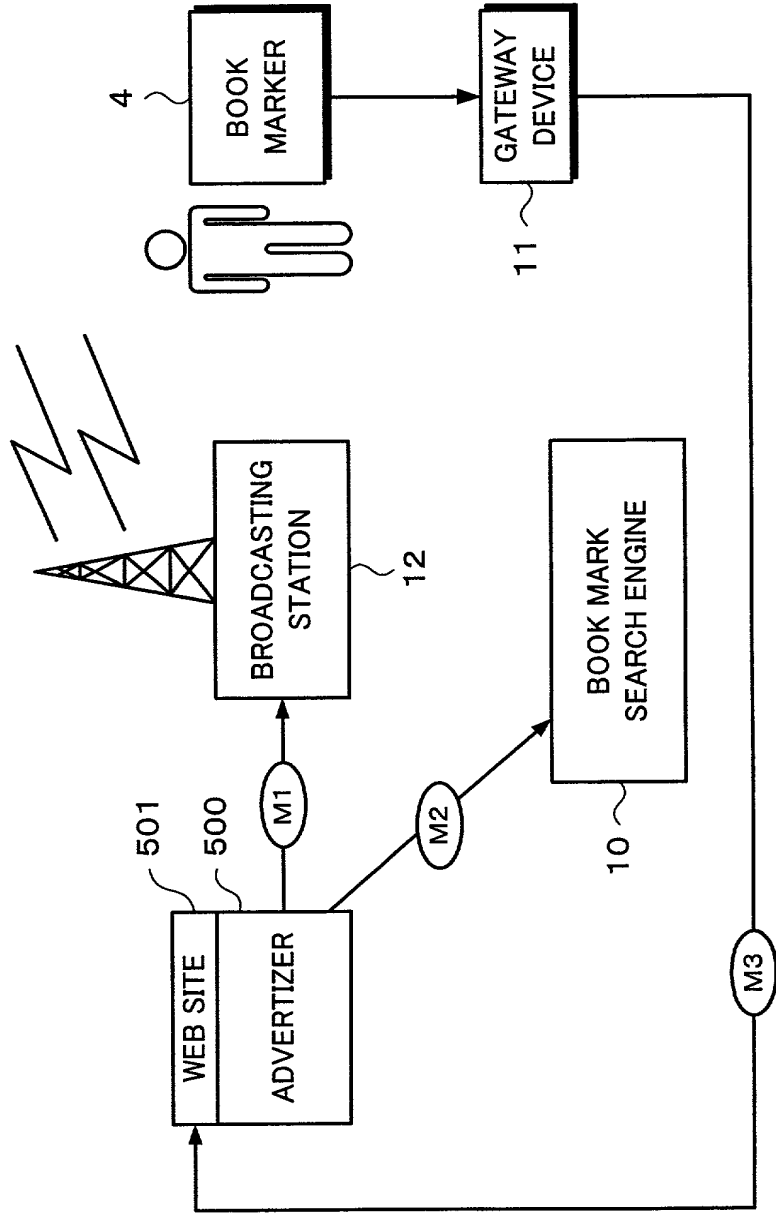

SONY-U0300

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one named is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

SEARCHING SYSTEM, SEARCHING UNIT, SEARCHING METHOD, DISPLAYING METHOD FOR SEARCH RESULTS, TERMINAL UNIT, INPUTTING UNIT, AND RECORD MEDIUM

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
(該当する場合) _____ に訂正されました。☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)
外国での先行出願Priority Not Claimed
優先権主張なしP11-304389 Japan
(Number) (Country)
(番号) (国名)26 October 1999
Month/Year Filed
(出願年月日)P11-306817 Japan
(Number) (Country)
(番号) (国名)28 October 1999
(Day/Month/Year Filed)
(出願年月日)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (Filing Date)
(出願番号) (出願日)(Application No.) (Filing Date)
(出願番号) (出願日)

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may be jeopardize the validity of the application or any patent issued thereon.

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark office connected therewith (*list name and registration number*)

Karl A. Limbach	18,689
George C. Limbach	19,305
John K. Uilkema	20,282
Neil A. Smith	25,441
Veronica C. Devitt	29,375
Ronald L. Yin	27,607
Gerald T. Sekimura	30,103
Michael A. Stallman	29,444
Philip A. Girard	28,848
Michael J. Pollock	29,098

Steven M. Everett	30,050
Alfred A. Equitz	30,922
Charles P. Sammut	28,901
Mark C. Pickering	36,239
Patricia Coleman James	37,155
Kathleen A. Frost	37,326
Alan A. Limbach	39,749
Douglas C. Limbach	35,249
Seong-Kun Oh*	
Kyla L. Harriel	41,815

* Recognition under 37 CFR 10.9(b)

Mayumi Maeda	40,075
Charles L. Hamilton	42,624
Andrew V. Smith	43,132
Eric N. Hoover	37,355
Frank J. Mycroft	46,946
Robert M. McConnell	46,912
J. Thomas McCarthy	22,420
Joel G. Ackerman	24,307
Roger S. Sampson	44,314
Susan M. Schmitt	34,427
Edward B. Weller	37,468

書類送付先

Send Correspondence to:

Charles P. Sammut, Esq.
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111-4262

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

直接電話連絡先： (名前及び電話番号)	Direct Telephone Calls to: (name and telephone number)
	Charles P. Sammut (415) 433-4150
唯一または第一発明者名	Full name of sole or first inventor: YUICHIRO DEGUCHI
発明者の署名	Inventor's signature
日付	Date
住所	Residence San Mateo, California, U.S.A.
国籍	Citizenship Japan
私書箱	Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN
第二共同発明者名	Full name of second joint inventor, if any AKIKO MATSUOKA
第二共同発明者の署名	Second Inventor's signature
日付	Date
住所	Residence Chiba, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o SONY CORPORATION 7-35, Kitashinagawa 6-chome Shinagawa-ku, Tokyo, 141-0001 JAPAN